

HSE

NOTES:

Rated Current:7.0AMP.

Contact Resistance: 20m Ω Max.

Withstand Voltage:1000V AC/DC


Insulation Resistance:1000M Ω Min.


Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass

Contact Plating: Sn Over Ni

Insulator Material: LCP+30%G.F UL94V-0 BK


$$6.30 \pm 0.15$$

$$[.248 \pm 0.006]$$


Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Ordering Information



1832-21 XX XX S XXX XX

No. of Pins	Contact Plating	Pin Length	Packing	Series No
02~20	SN=Tin	L=A+B+C	0=PE Bag 1=Type 1	

Standard:

•
•
•
•
•
•

•
•
•
•
•
•

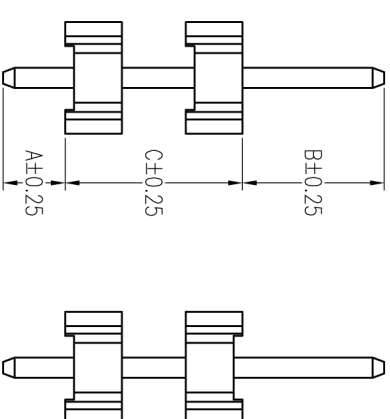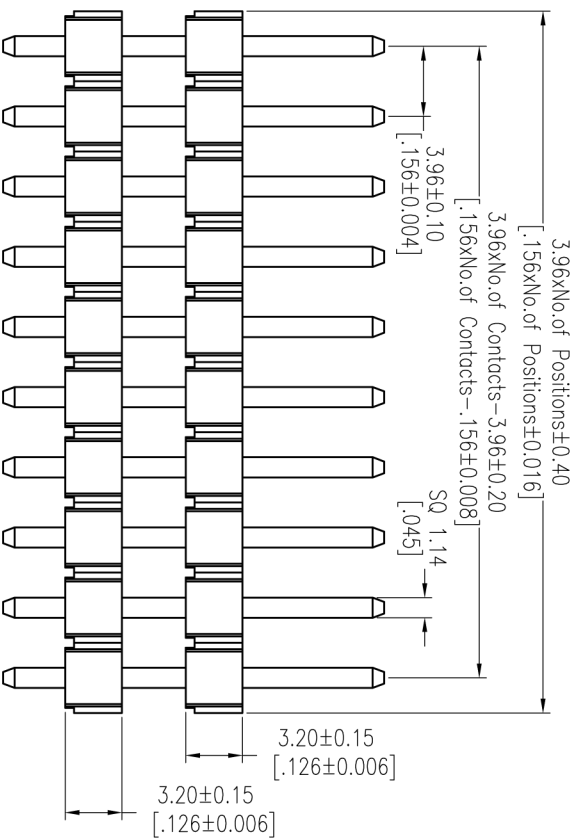

TYPE 1

TYPE 2

Item	Pin Length	A	B	C	Mating
Standard	----	3.50	8.00	----	2889
Alternate					

[illegible]