

HSE

NOTES:

Rated Current:3.0AMP.

Contact Resistance: 20m Ω Max.

Withstand Voltage:1000V AC/DC

Insulation Resistance: 1000M Ω Min.

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: PBT + 30%G.F UL94V-0 BK(std)





or PA9T+30%G.F UL94V-0 BK

Ordering Information

1125-22 XX XX R XXX X X

No. of Pins	Contact Plating	Pin Length(Short)	Series No.
Per Row:02~40	G0=Gold Flash	L=+B+D+D2+5.3	3=Type 1
	G3=10u"Gold	Standard:	4=Type 2
	G4=15u"Gold		
	G5=30u"Gold		
	S0=Gold Flash/Tin	Packing	
	S3=10u"Gold/Tin	0=PE Bag	
	S4=15u"Gold/Tin	T=Tube	
	S5=30u"Gold/Tin		

Item	Pin Length	A	D1	B	D2	Mating
Standard	----	3.00	----	6.00	----	2171 2185
Alternate						

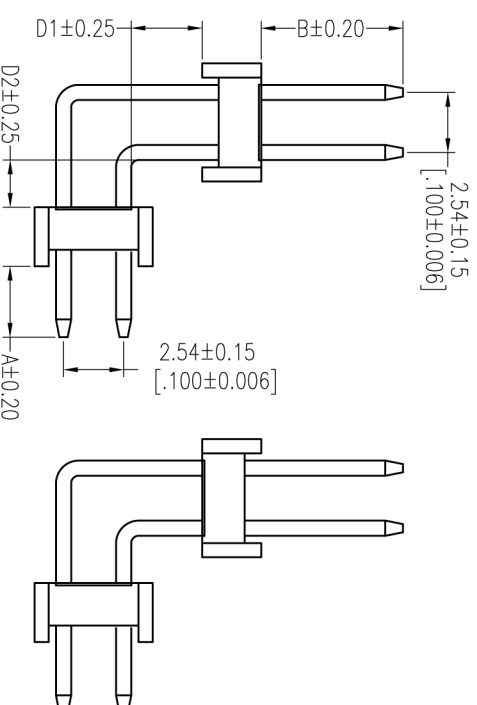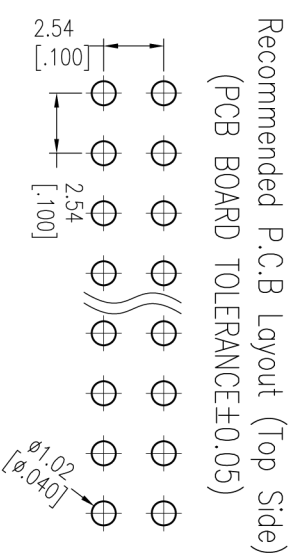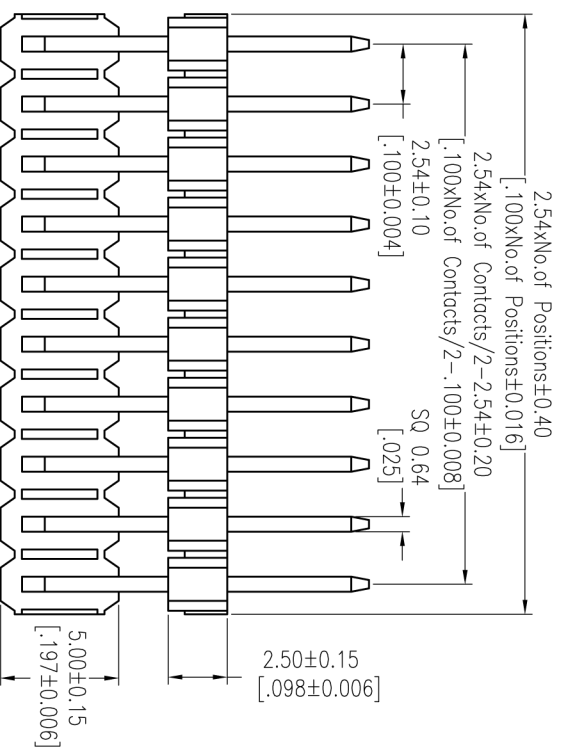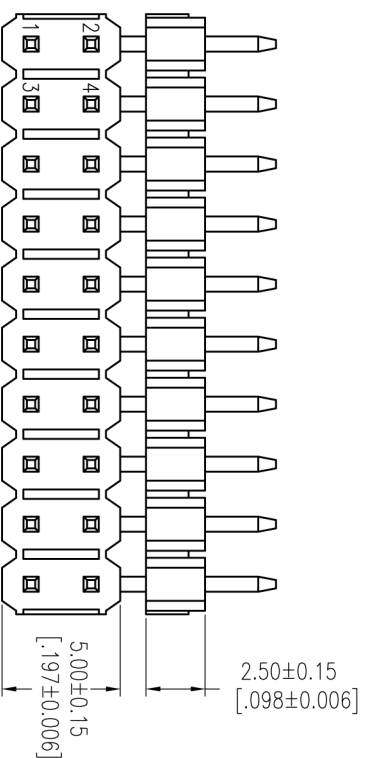

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION		DRAW	DATE	SCALE	Fit	PART NO.		
				X.X	±0.40	William Chen	2012.05.28	UNIT	mm	1125-22XXXXXXXXXX		
				X.XX	±0.25			CHECK	DATE		SIZE	A4
				X.XXX	±0.15						SHEET	1/1
A0	2012/05/28	NEW	-----	Angle	± 3'			APPROVE	DATE		PROJ.	
				DIM	TOL					Customer NO.		
上海回峰电子有限公司 Shanghai Hui Feng Electronic Technology Co., Ltd. 电话: 021-67150229 传真: 021-67150251 企业邮箱: huifeng_dzki@163.com 公司网站: www.huifeng-china.com												

上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd

电话: 021-67150229
传真: 021-67150251
企业邮箱: huifeng_dzkj@163.com
公司网站: www.huifeng-china.com