
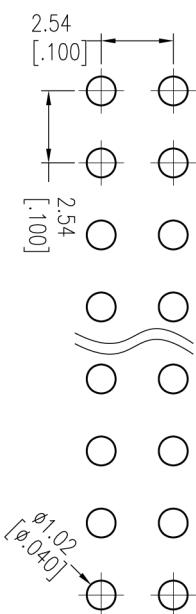


HSHF



NOTES:
 Rated Current:3.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:1000V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK

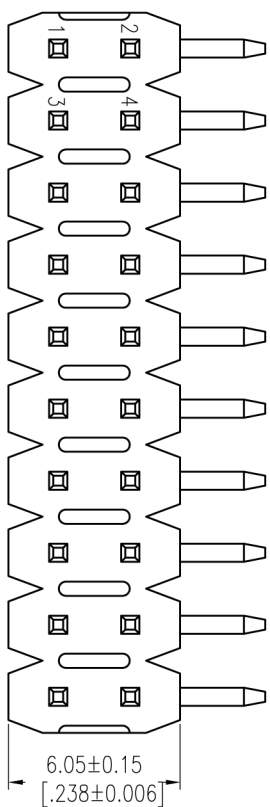

Ordering Information

1123-12 XX XX XX R XXX X 1

No. of Pins Contact Plating Pin Length (Short) Packing
 Per Row:02-40 G0=Gold Flash L=A+B+D+4.0 0=PE Bag
 G3=10u"Gold Standard:142=14.2 T=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

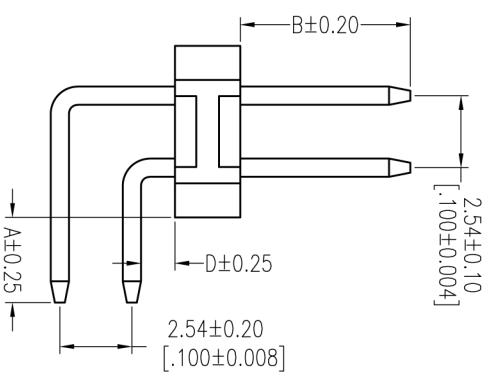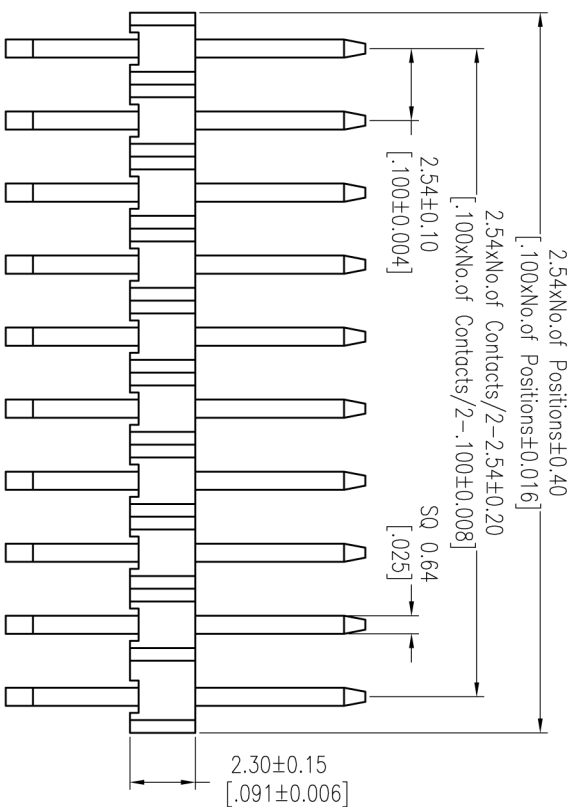

Item	Pin Length	A	D	B
Standard	14.20	3.00	1.20	6.00
Alternate				

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	<i>William Chen</i>		2012.05.08		mm		1123-12XXXXXXXXXX	
XX	±0.25	CHECK		DATE		UNIT		TITLE:	
X.XXX	±0.15	APPROVE		DATE		A4		PH2.54 DUAL ROW	
Angle	± 3'	DATE		SHEET		1/1		90° H=2.3 CONCAVE BENDING	
DIM	TOL	PROU.		Customer NO.		PROU.			
CHANGE									
REV	DATE	MODIFICATION DESCRIPTION							
A0	2012/05/08	NEW							
1									

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: huiheng_dzki@163.com
 公司网站: www.huiheng-china.com