

HSE

NOTES:

Rated Current:3.0AMP.

Contact Resistance: 20m Ω Max.

Withstand Voltage:1000V AC/DC

Insulation Resistance:1000M Ω Min.

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: PA9T+30%G.F UL94V-0 BK



Ordering Information

1125-13 XX XX R XXX X 1

No. 1

Per Row:03~40 G0=Gold Flash L=A+B+D+3.7 0=PE Bag

G3=10u"Gold Standard:139=13.9 T=Tube

G4=15u"Gold

G5=30u"Gold

SO=Gold Flash/1 in



SS=100 Gold/1 in

34-130 Gold/III
36-11C-14T

III 17100 7005-CC

Item	Pin Length	A	D	B	Mating
Standard	13.90	3.00	1.20	6.00	2185
Alternate					

			OPERATION		DRAW	DATE	SCALE	PART NO.
			X.X	±0.40	<i>William Chen</i>	2013 02 28	Fit mm [inch]	1125-13XXXXRXXXXX
A1	2013/02/28	Modify Drawing	X.XX	±0.25	CHECK	DATE	SIZE A4	PH2.54 THREE ROW 90° CONCAVE BENDING H=2.5
A0	2012/06/16	NEW	X.XXX	±0.15			SHEET 1/1	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM	TOL		PROJ.	Customer NO.
上海回峰电子科技有限公 Shanghai Hui Feng Electronic Technology Co., Ltd. 电话：021-67150229 传真：021-67150251 企业邮箱：hui Feng_dzki@163.com 公司网站：www.huifeng-china.com								

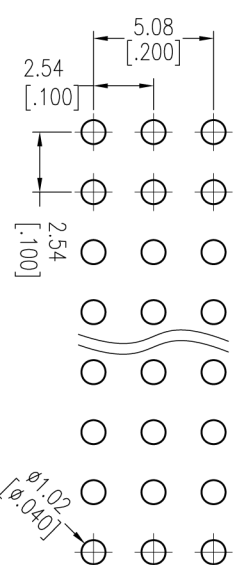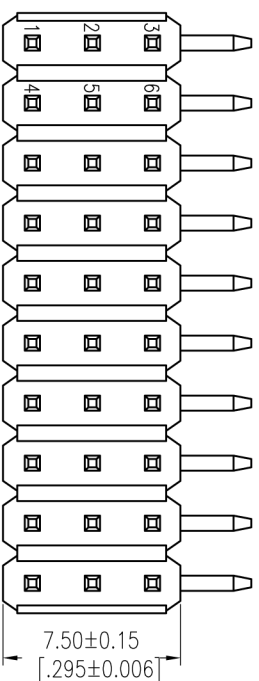

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

