

# HSHF

NOTES:  
 Rated Current:2.0AMP.  
 Contact Resistance:20mΩ Max.  
 Withstand Voltage:500V AC/DC  
 Insulation Resistance:1000MΩ Min.  
 Operation Temperature:-40℃ to +105℃



Contact Material:Brass  
 Contact Plating:Au or Sn Over Ni  
 Insulator Material:PA9T+30%G.F UL94V-0 BK

## Ordering Information



1220-22 XX XX S XXX XX

No. of Pins Contact Plating Pin Length Packing Series No.  
 Per Row:02-40 G0=Gold Flash L=A+B+C 0=P/E Bag 1=Type 1  
 G3=10u"Gold Standard: T=Tube Z=Type 2  
 G4=15u"Gold  
 G5=30u"Gold  
 S0=Gold Flash/Tin  
 S3=10u"Gold/Tin  
 S4=15u"Gold/Tin  
 S5=30u"Gold/Tin

Item	Pin Length	A	B	C	Mating
Standard	---	2.80	2.80	---	
Alternate	---	2.80	4.00	---	2240 2243 2263 2272

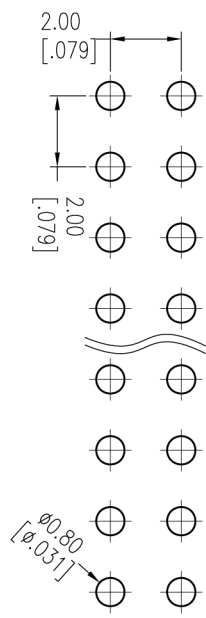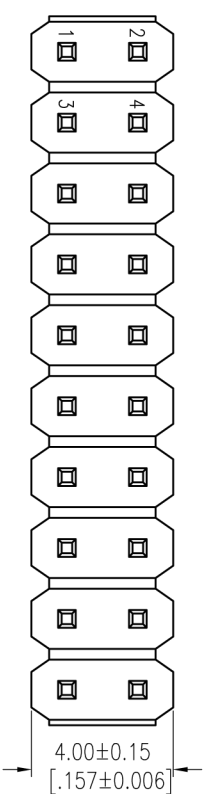

Recommended P.C.B Layout (Top Side)  
 (PCB BOARD TOLERANCE±0.05)

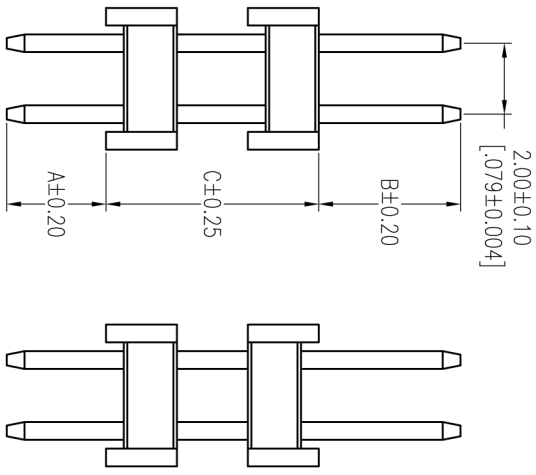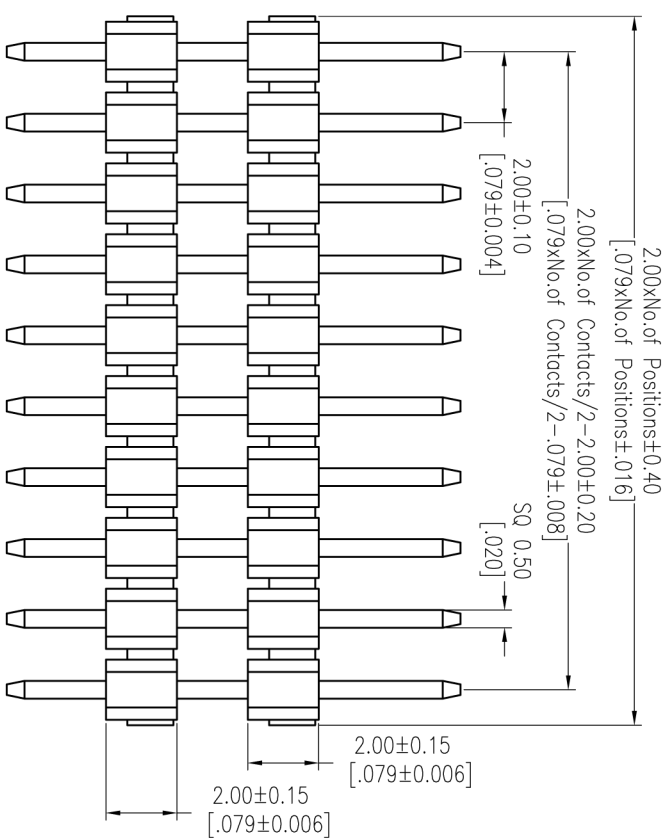

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	<b>上海回峰电子科技有限公司</b> Shanghai Hui Feng Electronic Technology Co., Ltd. 电话: 021-67150229 传真: 021-67150251 企业邮箱: huiheng_dzjkj@163.com 公司网站: www.huiheng-china.com
A0	2012/04/26	NEW	-----	XX ±0.40	<i>William Gao</i> CHECK	2012.04.26	mm	A4	1220-22XXXXXXSXXXXX	
				X.XX ±0.25		DATE	SIZE	A4	TITLE: DOUBLE PLASTIC 180° H=2.0	
				X.XXX ±0.15	APPROVE	DATE	SHEET	1/1	Customer NO.	
				Angle ± 3'			PROJ.			
				DIM	TOL					