
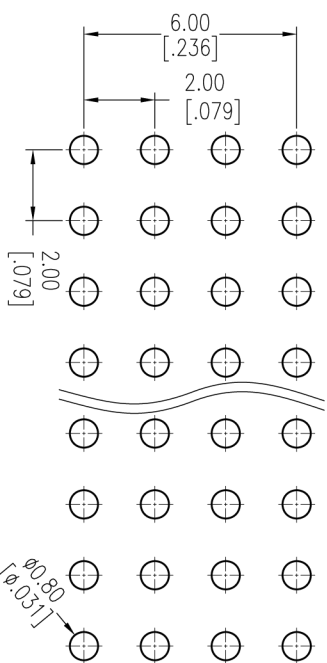


HSHF

NOTES:
 Rated Current:2.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃
 Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK


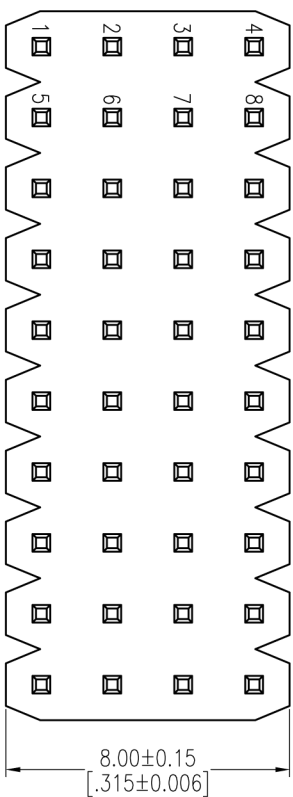


Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

Ordering Information

1220-14 XX XX S XXX X 1

No. of Pins Contact Plating Pin Length Packing
 Per Row:4-40 G0=Gold Flash L=A+B+2.0 0=PE Bag
 G3=10u"Gold Standard:08=8 8 1=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

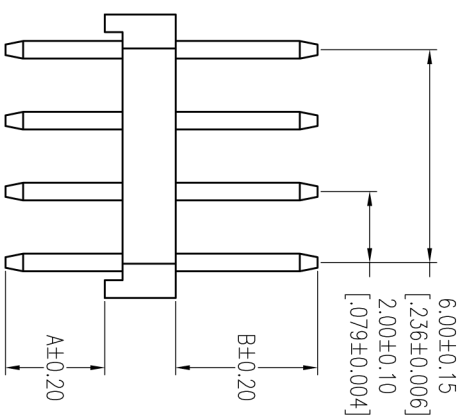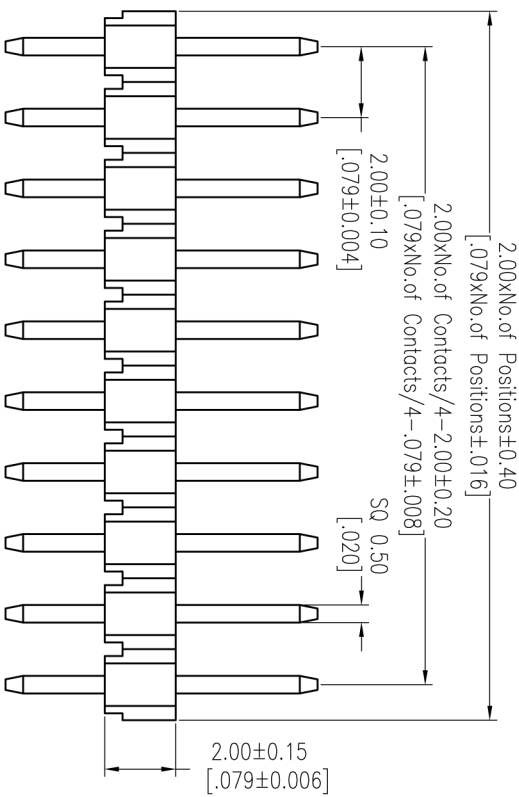

Item	Pin Length	A	B	Mating
Standard	8.80	2.80	4.00	2263
Alternate				

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	PART NO.	TITLE:	Customer NO.
A0	2012/04/26	NEW	-----	XX ±0.40	<i>William Gao</i>	2012.04.26	mm	1220-14XXXXXXXXXX	PH2.00 FOUR ROW 180° H=2.0	
				XX ±0.25	CHECK	DATE	A4			
				X.XXX ±0.15	APPROVE	DATE	1/1			
				Angle ± 3'						
				DIM TOL						

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzkj@163.com
 公司网站: www.huifeng-china.com