

HSF

NOTES:

Rated Current:1.0AMP.
 Contact Resistance:20mΩ Max.
 Withstand Voltage:500V AC/DC
 Insulation Resistance:1000MΩ Min.
 Operation Temperature:-40℃ to +105℃



Contact Material:Brass
 Contact Plating:Au or Sn Over Ni
 Insulator Material:PA9T+30%G.F UL94V-0 BK

Ordering Information



1325-22 XX XX S XXX X 1

No. of Pins Contact Plating Pin Length Packing
 Per Row:02-50 G0=Gold Flash L=A+B+C A=Tray
 G3=10u"Gold Standard: T=Tube
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin

Item	Pin Length	A	B	C	Mating
Standard	---	1.80	1.90	---	2321
	---	1.80	3.00	---	2334
	---	1.80	4.00	---	2344
Alternate					

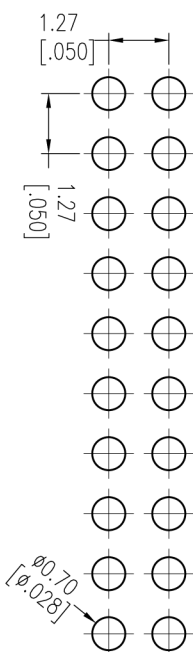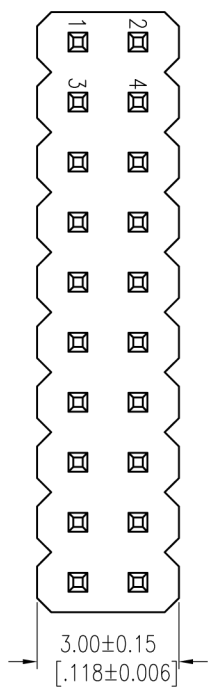

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

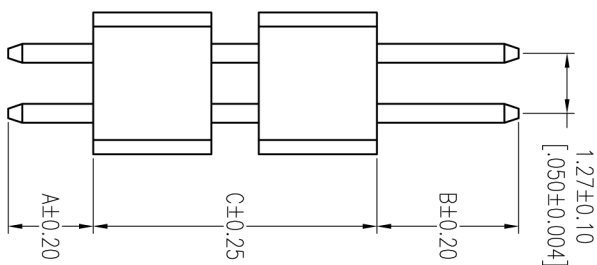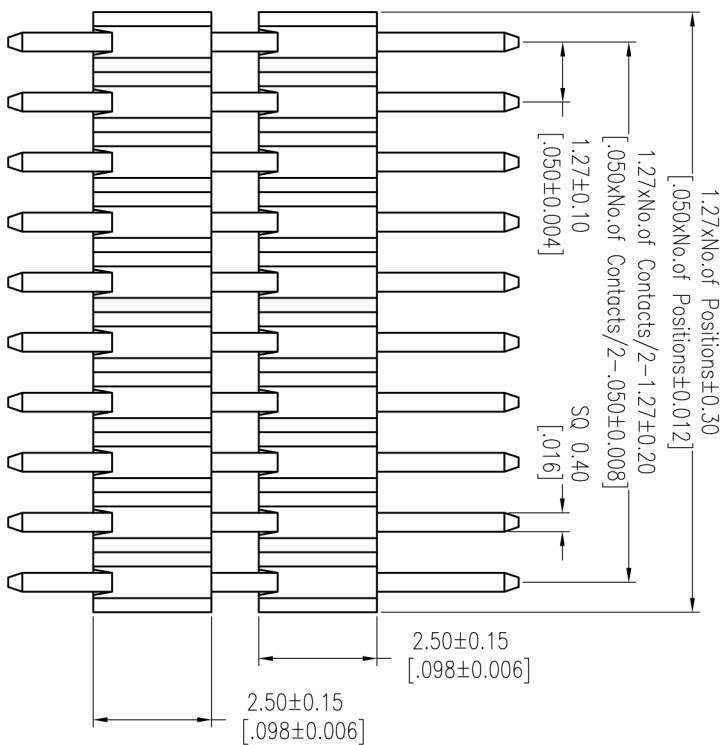

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	SCALE	PART NO.	TITLE:	上海回峰电子科技有限公司
A0	2012/03/31	NEW	-----	XX ±0.40	mm	1325-22XXXXXX	PHI. 27 DUAL ROW	上海回峰电子科技有限公司
				XX ±0.25	A4		DOUBLE PLASTIC 180° H=2.5	Shanghai Hui Feng Electronic Technology Co., Ltd.
				X.XXX ±0.15	SHEET			电话: 021-67150229
				Angle ± 3'	1/1			传真: 021-67150251
				DIM TOL	PROJ.			企业邮箱: hui Feng_dzkj@163.com
								企业网站: www.huifeng-china.com

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzkj@163.com
 企业网站: www.huifeng-china.com