



NOTES:

Rated Current:1.0AMP.

Contact Resistance: 20m Ω Max.

Insulation Resistance:1000M Ω Min.

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass

Contact Plating: Au or Sn Over Ni

Insulator Material: PA9T+30%G.F UL94V-0 BK

Ordering Information

1315-12 XX XX R XXX X 1

No. of Pins	Contact Plating	Pin Length(Short)	Packing
Per Row:02~50	G0=Gold Flash	L=A+B+D+2.5	A=Tray

G3=10u"Gold	Standard:072=7.2	T=Tube
G4=15u"Gold	083=8.3	




04-12u Gold	005=0.5
G5=30u"Gold	093=9.3

S0=Gold Flash/Time


S3=10u"Gold/1in

S5=30u"GoldTin

Item	Pin Length	A	D	B	Mating
Standard	7.20	1.80	1.00	1.90	2321
	8.30	1.80	1.00	3.00	2334
	9.30	1.80	1.00	4.00	2344
Alternate					

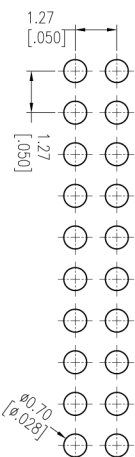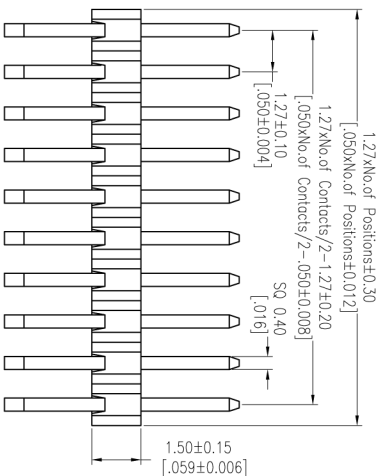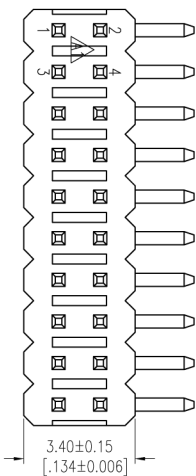

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)



		OPERATION		DRAW	DATE	PART NO.	
			William Chen	1315-12XXXXXXX			
A1	2015/01/03	Moldy Drawing	CHECK	DATE	SCALE	Fit	
A0	2012/03/15	NEW	XXXX	DATE	UNIT	TITLE:	
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DATE	SHEET	PHI.27 DUAL ROW R/A	
			DIM	APPROVE	1/1	CONCAVE BENDING H=1.5	
			TOL	PROJ.	Customer NO.		
 上海峰电子科技有限公司 Shanghai Hui Feng Electronic Technology Co., Ltd							
电话: 021-67150229 传真: 021-67150251 企业邮箱: hufeng_dz@163.com 公司地址: www.hufeng-china.com							

上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
传真: 021-67150251
企业邮箱: huifeng_dzkj@163.com
公司网站: www.huifeng-china.com