HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance:30mΩ max
Withstand Voltage:1000V AC/DC
Insulation Resistance:1000MΩ
Operation Temperature:−55℃~+105℃

Contact Material: Brass
Contact Plating: Au and Sn over Ni
Fixing Material: Phosphor Bronze
Fixing Plating: Sn over Ni
Insulation Material: PBT+30% G.F(UL94V−0)

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

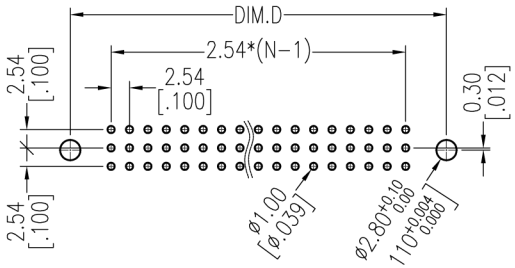

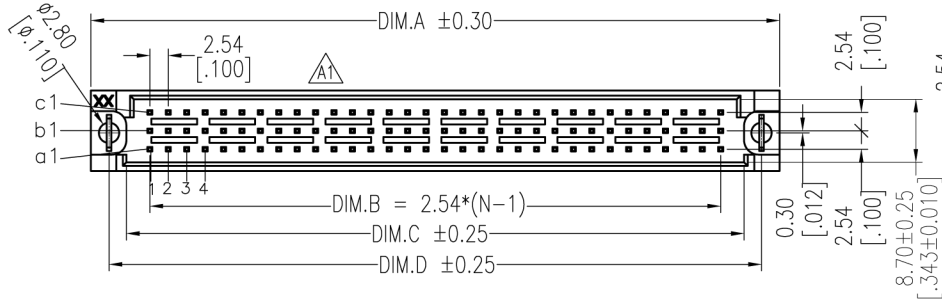

Ordering Information

3410-3 XX X MS SX X A X

No.of Pins	Rows with contacts	Contact Plating:		Packing:	DIP length
Per Row	A=a+b+c	S0=Gold Flash/Tin	W=With Lock	A=Tray	1:L=2.50
10pin	B=a+b	S1=3u"Gold/Tin	N=Without Lock		2:L=3.00
16pin	C=a+c	S3=10u"Gold/Tin			3:L=4.00
32pin	D=a	S4=15u"Gold/Tin			4:L=4.57
		S5=30u"Gold/Tin			
		SN=Tin			

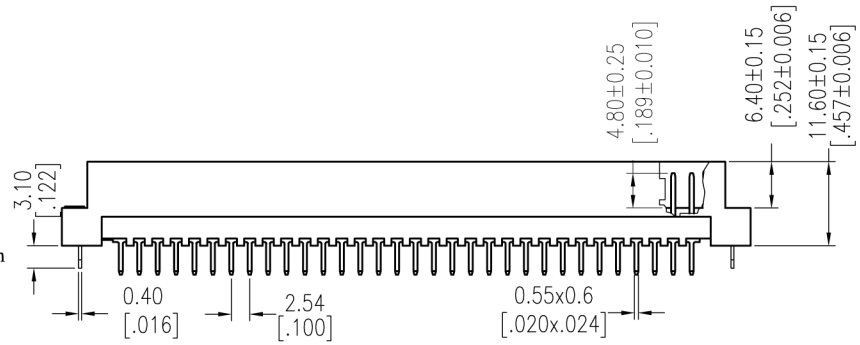

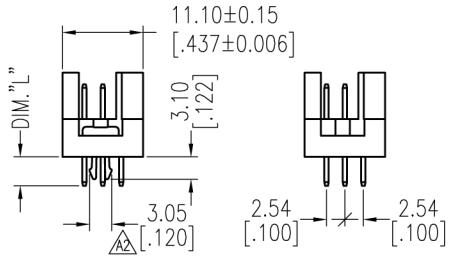

W:With Lock N:Without Lock

R	96	3	32	95.00	78.74	85.20	90.00
R/2	48	3	16	54.40	38.10	44.60	50.00
R/3	30	3	10	39.16	22.86	29.30	34.76
TYPE	POS.	ROWS	N	DIM.A	DIM.B	DIM.C	DIM.D

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A2	2014/08/12	Modify the dim	——
A1	2014/06/26	Modify	——
A0	2014/06/05	NEW	——

OPERATION	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	± 3°
DIM	TOL

DRAW	JYHuang	DATE	2014/08/12
CHECK		DATE	
APPROVE		DATE	

SCALE	FIT
UNIT	mm inch
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. 3410-3XXXMSSXXAX

TITLE:
2.54PITCH DIN 41612
Male 180° DIP(R-Type)

Customer NO.

上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd.
电话：021-67150229
传真：021-67150251
企业邮箱：huifeng_dzkj@163.com
公司网站：www.huifeng-china.com