

HSE

TECHNICAL SPECS:

Current Rating: 3.0AMP

Contact Resistance: 10m Ω Max

Dielectric Strength: Min 1000V_{RMS}

Mechanical Life: Min 500 cycles

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: $\varnothing 0.47\text{mm}$

Insulator Material: PPS+30%G.F(UL94V-0)





Ordering Information

3510-302 XX S XX 100 X 1

No. of Pin	Contact Plating
2~50PIN	G0=Gold Flash

Packing
A=Tray
T=Tube

G4=15u"Gold
G5=30u"Gold

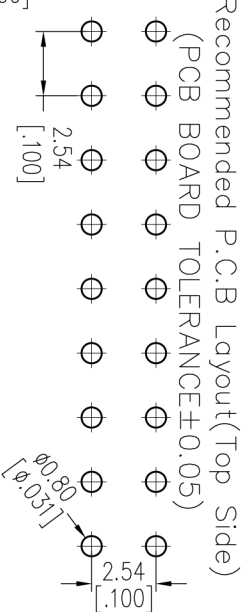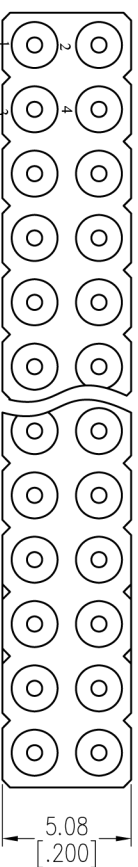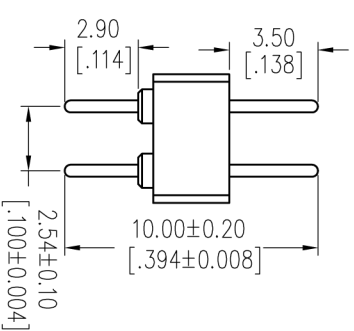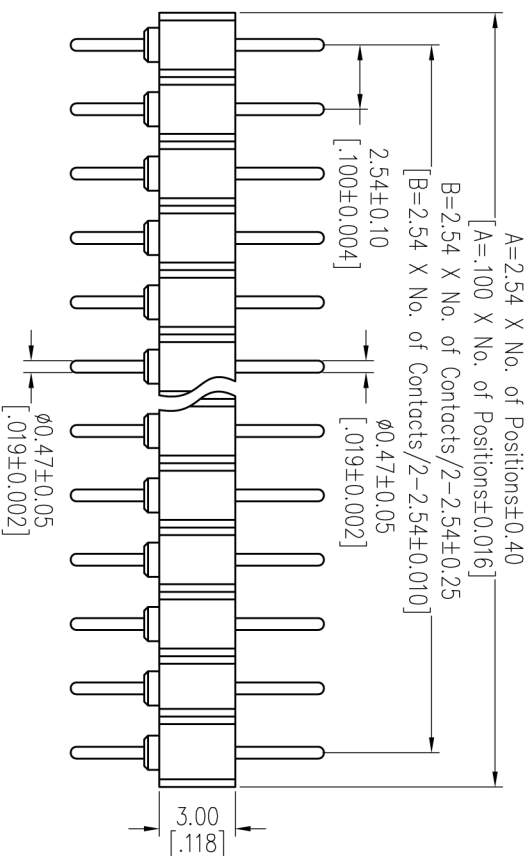

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
				X.X	JYHuang	2012/10/22	UNIT	mm	3510-302XXSXX100X1
				X.XX	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX	±0.15		SHEET	1/1	2.54mm MACHINED PIN HEADER
		NEW	-----	Angle	± 3°	DATE	PROJ.	☉	DUAL ROW 180° H=3.00 L=1.0.0
				DIM	TOL				Customer NO.
 上海回峰电子科技有限公司 Shanghai Hui Feng Electronic Technology Co., Ltd. 电话: 021-67150229 传真: 021-67150251 企业邮箱: hui Feng - dzkj@163.com 公司网站: www.huifeng-china.com									



上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd

电话: 021-67150229
传真: 021-67150251
企业邮箱: huifeng_dzkj@163.com
公司网站: www.huifeng-china.com