

HSE

TECHNICAL SPECS:

Current Rating:1.0AMP

Contact Resistance: 10m Ω Max

Dielectric Strength: Min 1000V_{RMS}

Mechanical Life: Min 500 cycles

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni

Connecting Pin: $\varnothing 0.41\text{ mm}$

Insulator Material: PPS+30%G.F(UL94V-0)

Ordering Information

3514-192 XX S XX 081 X 1


No. of Pins
2~50PIN

Contact Plating
 G0=Gold Flash




Packing
A=Tray
T=Tube

G3=10u"Gold
G4=15u"Gold
G5=30u"Gold

Item	Pitch	Mating
Standard	1.27	3524
Alternate		

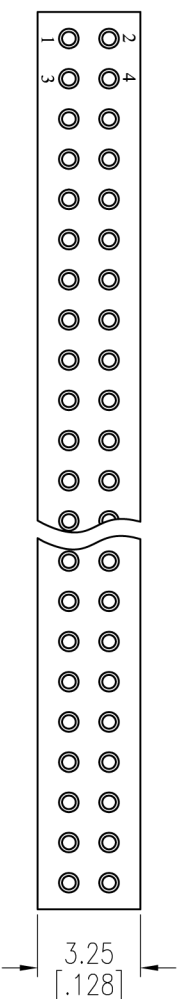[illegible]

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

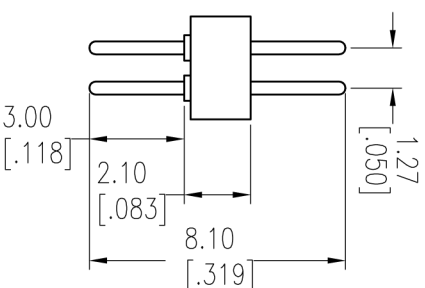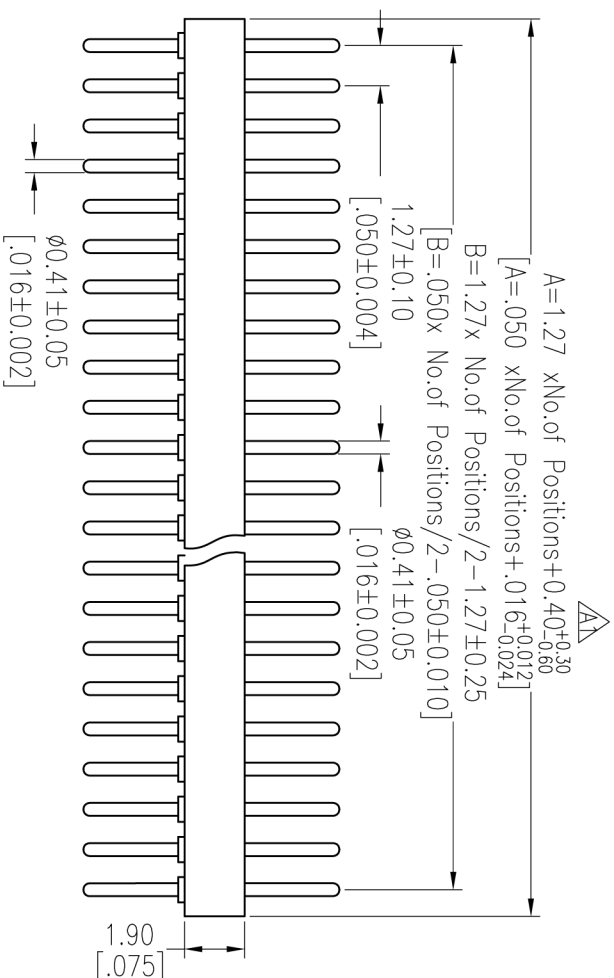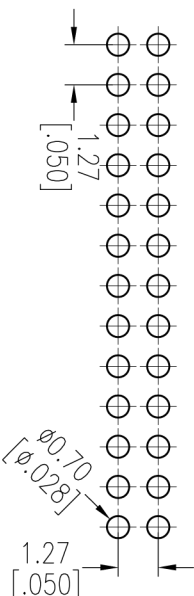

上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd

电话: 021-67150229
传真: 021-67150251
电子邮箱: huifeng_dzkj@163.com
公司网站: www.huifeng-china.com