

HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)

Contact plating: Au over Ni





Connecting Pin: φ0.47mm

Insulator Material: PPS+30%G.F(UL94V-0)

Ordering Information

3510-302 XX S XX 100 X 1

No. of Pin: 2-50PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Packing: A=Tray, T=Tube

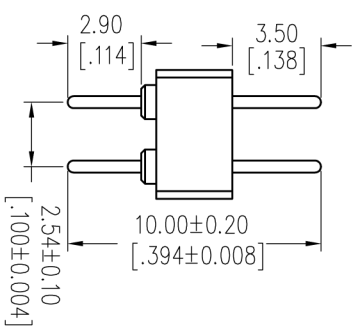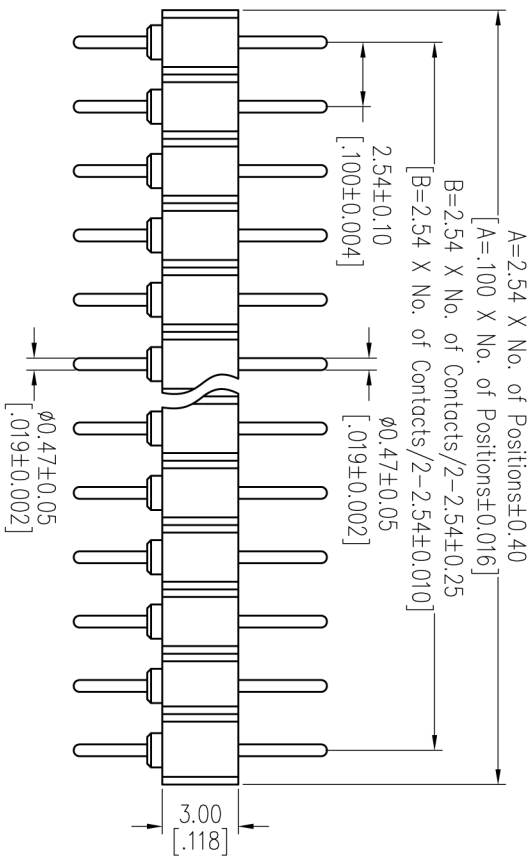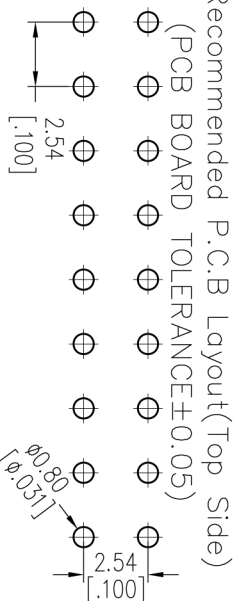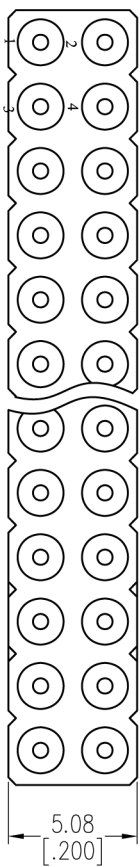

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	JYhuang		2012/10/22		mm		3510-302XXSXX100X1	
XX	±0.25	CHECK		DATE		A4		TITLE:	
X.XXX	±0.15	APPROVE		DATE		1/1		2.54mm MACHINED PIN HEADER	
Angle	± 3'							DUAL ROW 180° H=3.00 L=10.0	
DIM	TOL	CHANGE				PROJ.		Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION							
A0	2012/10/22	NEW							

HF 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: huiheng_dzki@163.com
 公司网站: www.huiheng-china.com