

HSF

TECHNICAL SPECS:

Current Rating: 3.0AMP
 Contact Resistance: 10m Ω Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C360000)
 Contact plating: Au over Ni
 Connecting Pin: Ø0.50mm
 Insulator Material: PPS+30%G.F(Ul94V-0)




Ordering Information

3510-301 XX R XX 127 X 1

No. of Pin: 2-50PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold
 Packing: A=Tray, T=Tube

Item	Pitch	Mating
Standard	2.54	3520
Alternate		

Recommended P.C.B Layout(Top Side)
 (PCB BOARD TOLERANCE±0.05)

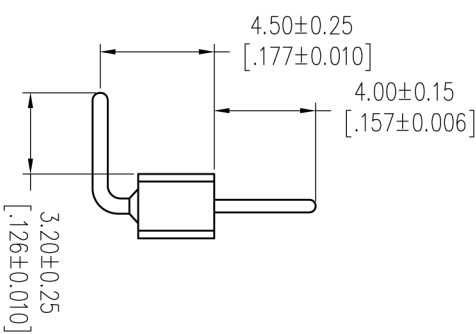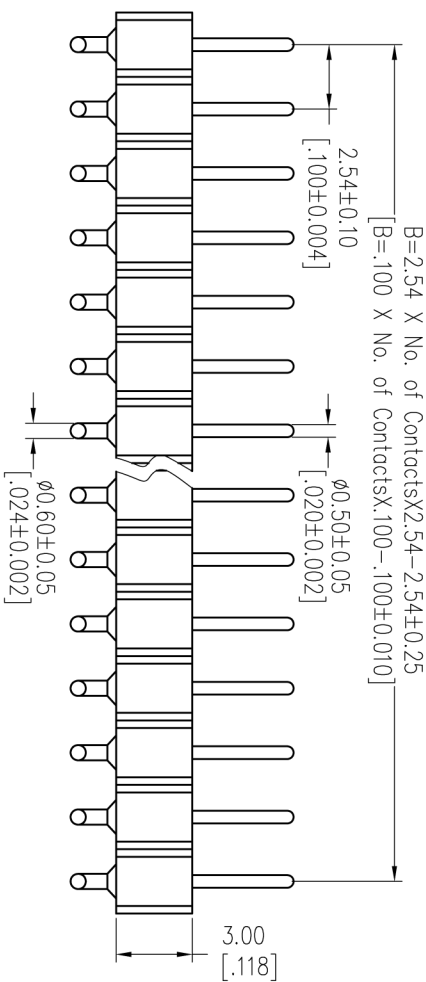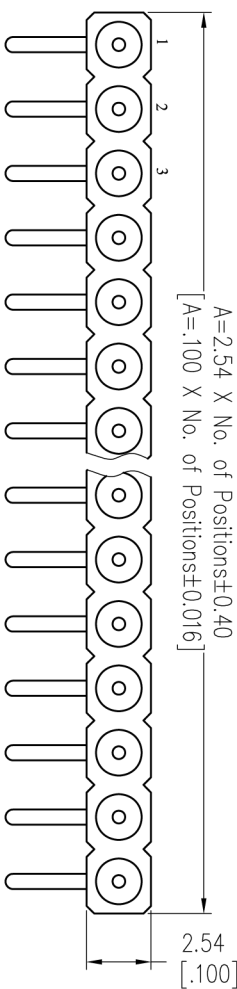

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/10/22	NEW		XX ±0.40	JYhuang	2012/10/22	mm	A4	3510-301XXRX127X1
				X.XX ±0.25	CHECK	DATE	SIZE	A4	TITLE:
				X.XXX ±0.15			SHEET	1/1	2.54mm MACHINED PIN HEADER
				Angle ± 3'	APPROVE	DATE	PROJ.		SINGLE ROW 90° H=3.00 L=12.75
				DIM TOL					Customer NO.

HF 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzki@163.com
 公司网站: www.huifeng-china.com