

TECHNICAL SPECS:




Current Rating: 3.0AMP
 Contact Resistance: 10mΩ Max
 Dielectric Strength: Min 1000Vrms
 Mechanical Life: Min 500 cycles
 Operation Temperature: -40°C to +105°C

Sleeve: Brass CuZn36Pb3(C36000)
 Connecting Pin: φ0.47mm
 Contact plating: Au or Sn over Ni
 Insulator Material: PPS+30%G.F.(UL94V-0)

Ordering Information

3512-281 XX R XX 118 X 1

No. of Pin: 2-40PIN
 Contact Plating: G0=Gold Flash, G3=10u"Gold, G4=15u"Gold, G5=30u"Gold, SN=Tim
 Packing: A=Tray, T=Tube

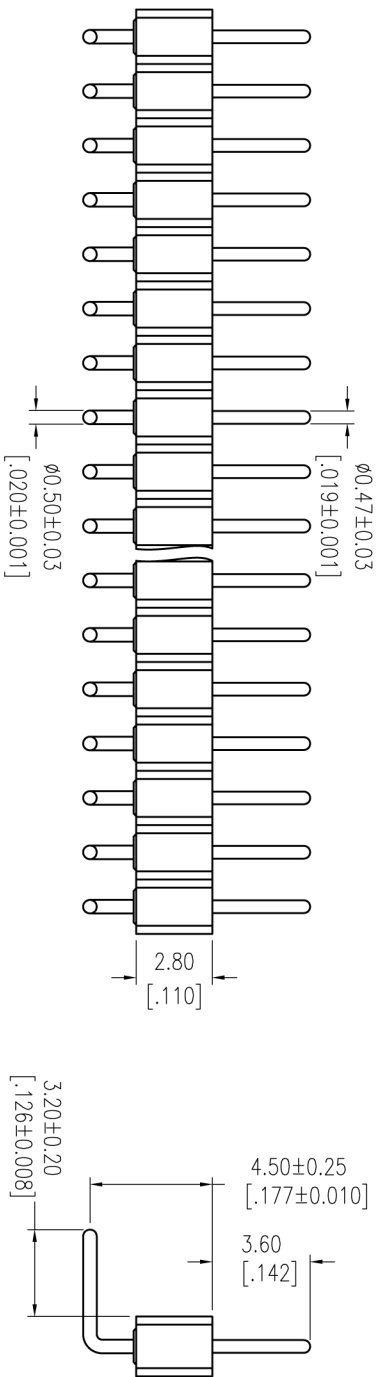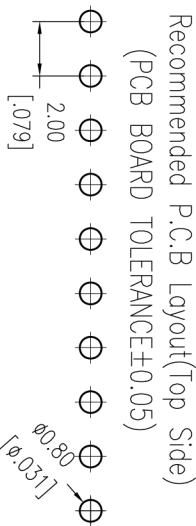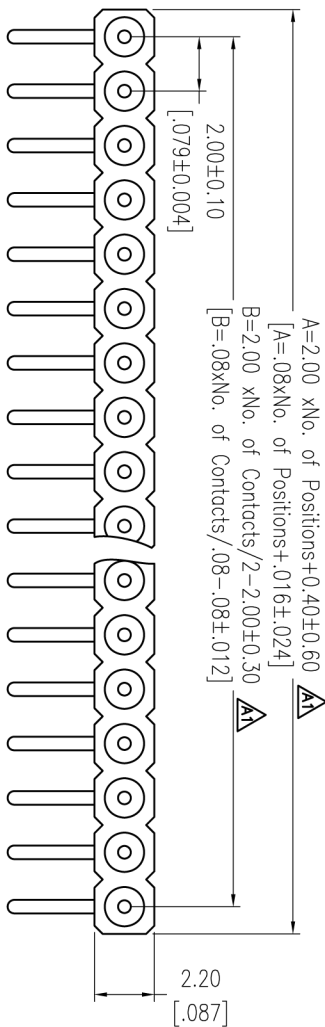

OPERATION		DRAW		DATE		SCALE		FIT		PART NO.	
X.X		myq		2012/01/03		mm		1/1		3512-281XXRX118X1	
X.XX		CHECK		DATE		UNIT		A4		TITLE:	
X.XXX		±0.25		DATE		SIZE		1/1		2.00mm MACHINED PIN HEADER SINGLE ROW 90° H=2.80 L=11.8	
Angle		±0.15		DATE		SHEET		1/1		Customer NO.	
DIM		± 3°		DATE		PROJ.		1/1			
TOL		± 3°		DATE		PROJ.		1/1			
CHANGE		APPROVE		DATE		PROJ.		1/1			
MODIFICATION DESCRIPTION		APPROVE		DATE		PROJ.		1/1			
NEW		APPROVE		DATE		PROJ.		1/1			
A1		Modify drawing		DATE		PROJ.		1/1			
A0		NEW		DATE		PROJ.		1/1			
REV		DATE		DATE		PROJ.		1/1			
1		09/02/26		2012/01/03		PROJ.		1/1			

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: huiheng_dzki@163.com
 公司网站: www.huiheng-china.com