



NOTES:




Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%GF UL94V-0

Ordering Information

3112-XX S XX B K00 X 1

No. of Pins: 10P 30P, 14P 34P, 16P 40P, 20P 50P, 24P 60P, 26P 64P
 Contact Plating: G0=Gold Flash, G3=10"Gold, G4=15"Gold, G5=30"Gold, S0=Gold Flash/Tm, S3=10"Gold/Tm, S4=15"Gold/Tm, S5=30"Gold/Tm, SN=Tm
 Color Insulator: B=Black, U=Blue, G=Gray(427C), F=Gray(413C)
 Packing: A=Tray, T=Tube

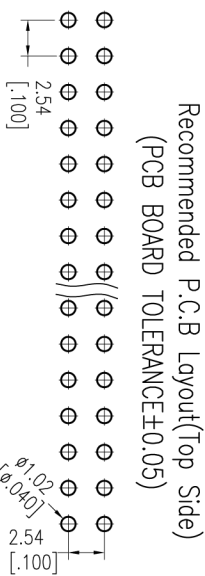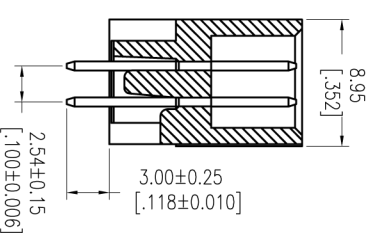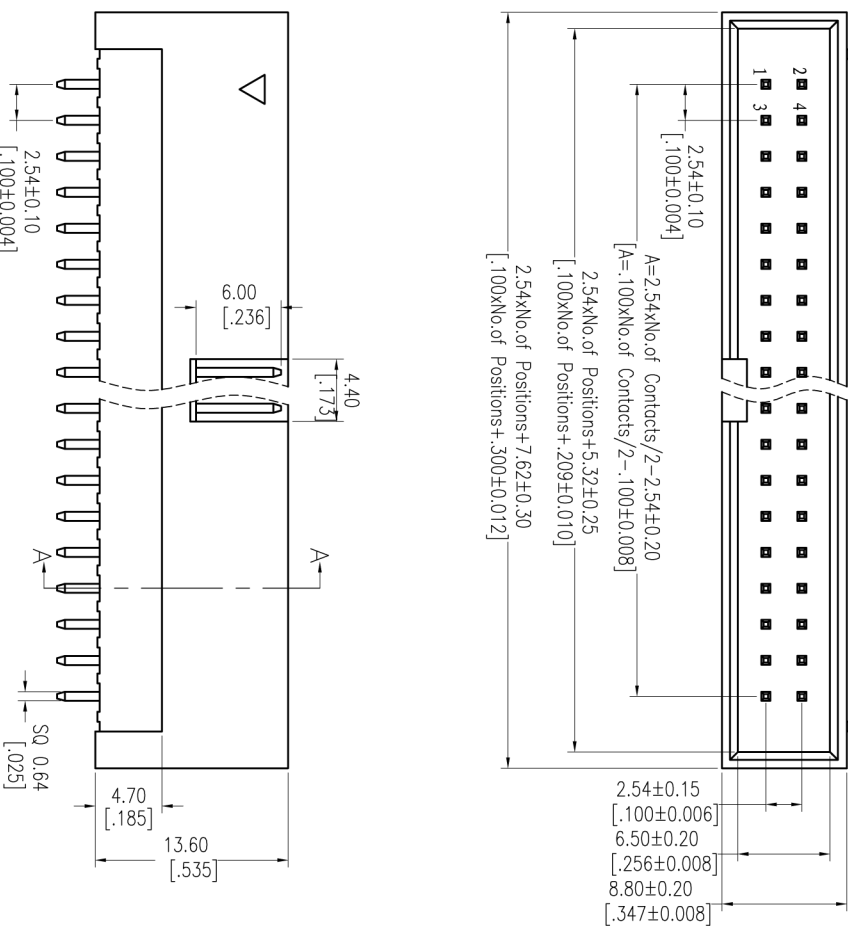

Recommended P.C.B Layout (Top Side)
 (PCB BOARD TOLERANCE±0.05)

ITEM	≤20P	>20P
A	±0.20	±0.30

A(TOLERANCE)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A1	2014/05/05	MODIFY		XX	Allen	2014/05/05	mm	A4	3112-XXXXXBK00XX
A0	2012/09/25	NEW		X.XXX	CHECK	DATE	SIZE	1/1	TITLE: 2.54 BOX HEADER 180° H=1.3.6
				Angle	APPROVE	DATE	SHEET	PROJ.	Customer NO.
				± 3'			1/1		
				DIM					
				TOL					

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzkj@163.com
 公司网站: www.huifeng-china.com