

HSF

NOTES:


Current Rating: 3.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 1000V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Brass/Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5310-XX X XX X 02

No. of Pins	Contact Material	Contact Plating	Color Insulator
06 30	S0=Gold Flash/Ni		B=Black
08 34	B=Brass	S3=10u"Gold/Ni	G=Grey(427C)
10 36	P=Phosphor Bronze	S4=15u"Gold/Ni	E=Grey(413C)
14 40		S5=30u"Gold/Ni	SN=Tin
16 50		SM=Mate Tin	
20 60			
24 64			
26			

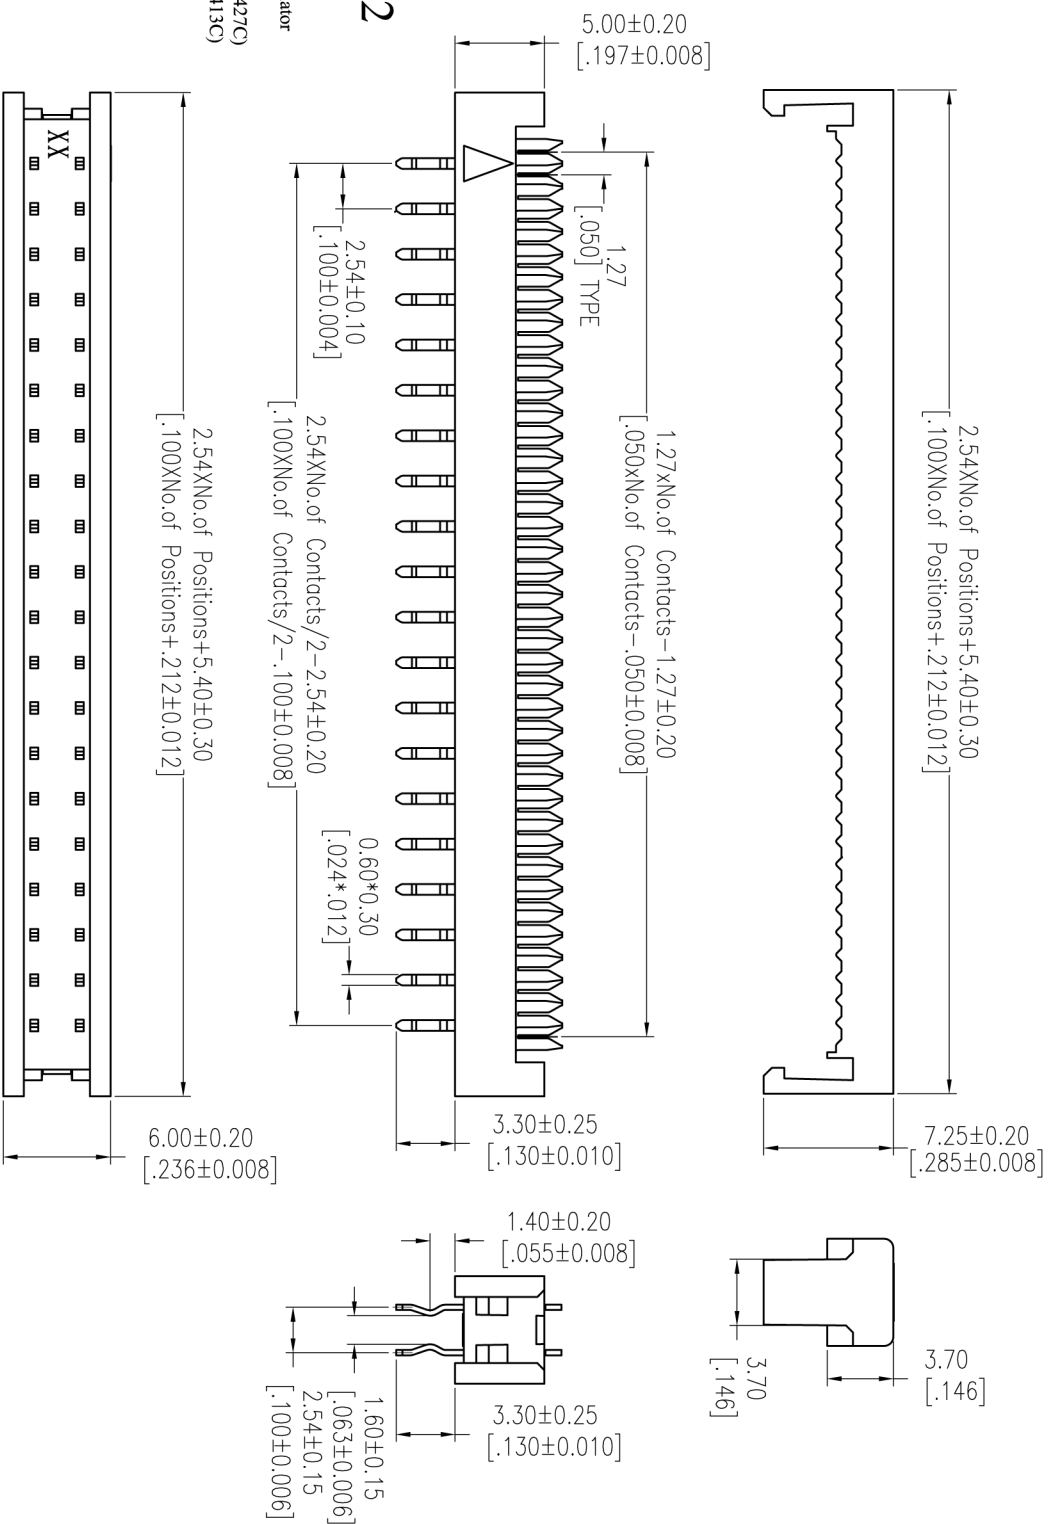

		OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	
		XX	JYhuang	2014/05/26	mm		5310-XXXXXX02	
		XX	CHECK	DATE	UNIT	SIZE	TITLE:	
		X.XXX			A4	A4	2.54 DIP PLUG CONNECTOR	
REV	DATE	MODIFICATION	DESCRIPTION	CHANGE	DIM	TOL	APPROVE	DATE
A0	2014/05/26	NEW		-----	Angle	± 3'	SHEET	1/1
				---	PROJ.	1/1	Customer NO.	

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: huifeng_dzj@163.com
 公司网站: www.huifeng-china.com