

HSF


NOTES:

- Current Rating: 1.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze **A**
- Contact plating: Au Or Sn over Ni
- Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5320-XX P XX B 01

No. of Pins	Contact Plating	Color Insulator
10 30	S0=Gold Flash/Ni	B=Black
14 34	S3=10μ"Gold/Ni	G=Grey(427C)
16 40	S4=15μ"Gold/Ni	E=Grey(413C)
18 44	S5=30μ"Gold/Ni	
20 50	SN=1In	
24 60	SN=1In	
26 64	SM=Matte Tin	

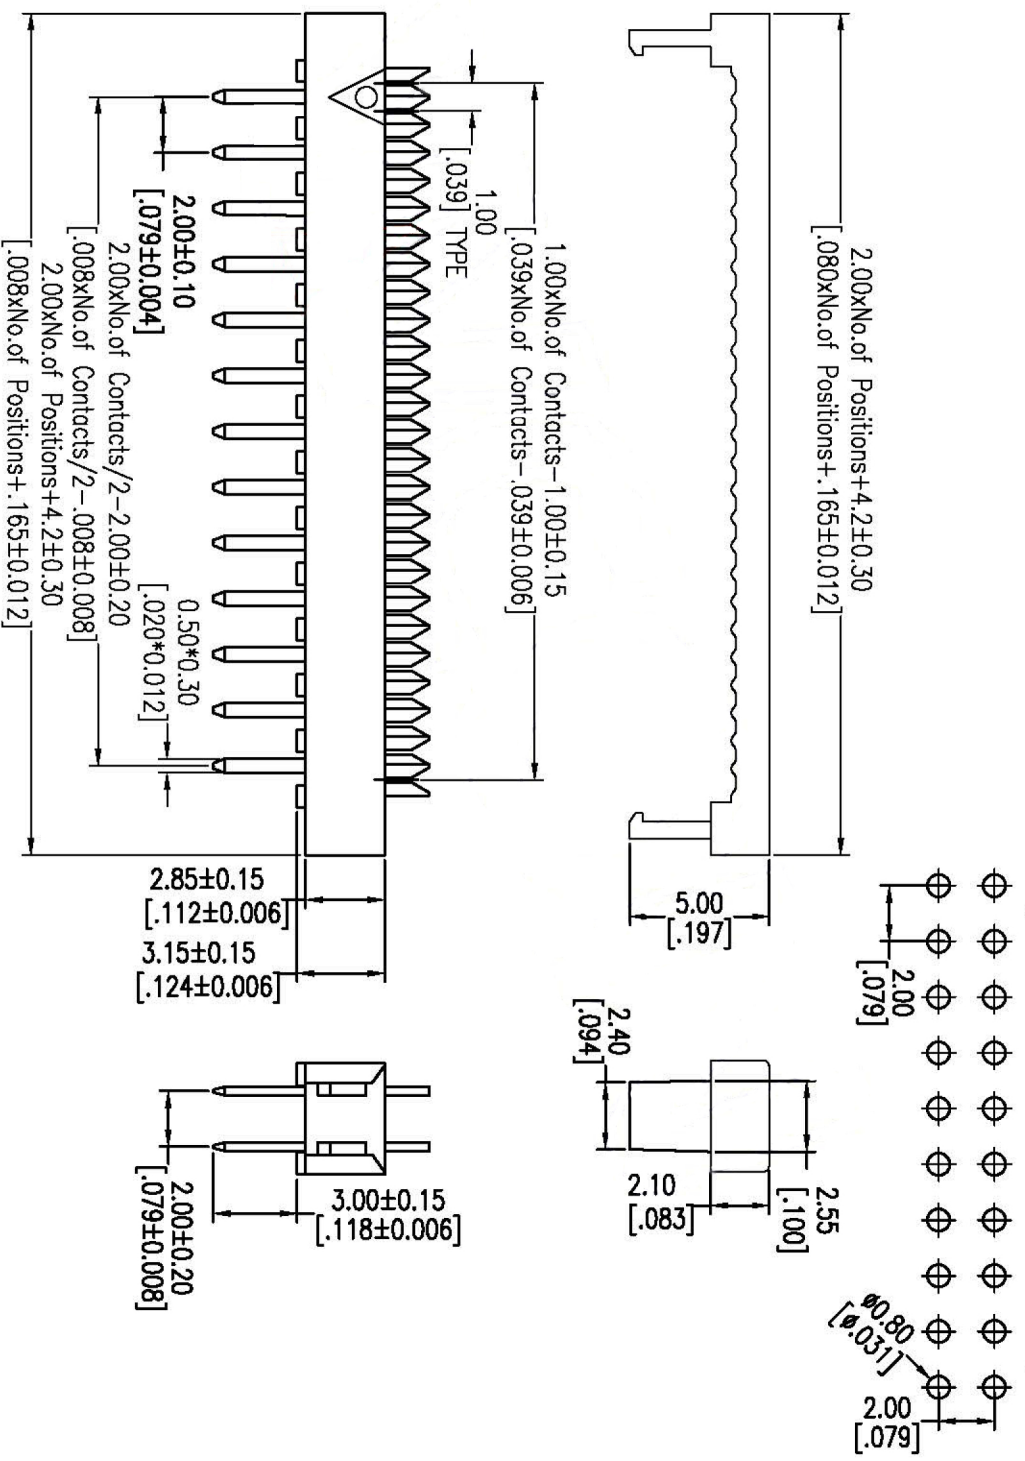

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	上海回峰电子科技有限公司 Shanghai Hui Feng Electronic Technology Co., Ltd. 电话: 021-67150229 传真: 021-67150251 企业邮箱: huiheng_dzkj@163.com 公司网站: www.huiheng-china.com
A1	2013/07/03	Modify The Contact Material,Modify Part No.	X.X	±0.40	JYHuang	2013/07/03	mm	A4	5320-XXPXXB01	2.00 DIP PLUG CONNECTOR	
A0	2012/10/09	NEW	X.XXX	±0.15	CHECK		mm	A4			
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	PROJ.	Customer NO.		
1			DM	± 3°			1/1				