

HSF

NOTES:


Current Rating: 1.0AMP
 Contact Resistance: 20mΩ Max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ Min
 Operation Temperature: -40°C to +105°C

Contact Material: Phosphor Bronze **△**
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5320-XX P XX B 01

No. of Pins	Contact Plating	Color Insulator
10 30	S0=Gold Plating/Ni	B=Black
14 34	S3=10μ"Gold/Ni	G=Grey(427C)
16 40	S4=15μ"Gold/Ni	E=Grey(413C)
18 44	S5=30μ"Gold/Ni	
20 50	SN=1In	
24 60	SM=Matte Tin	
26 64		

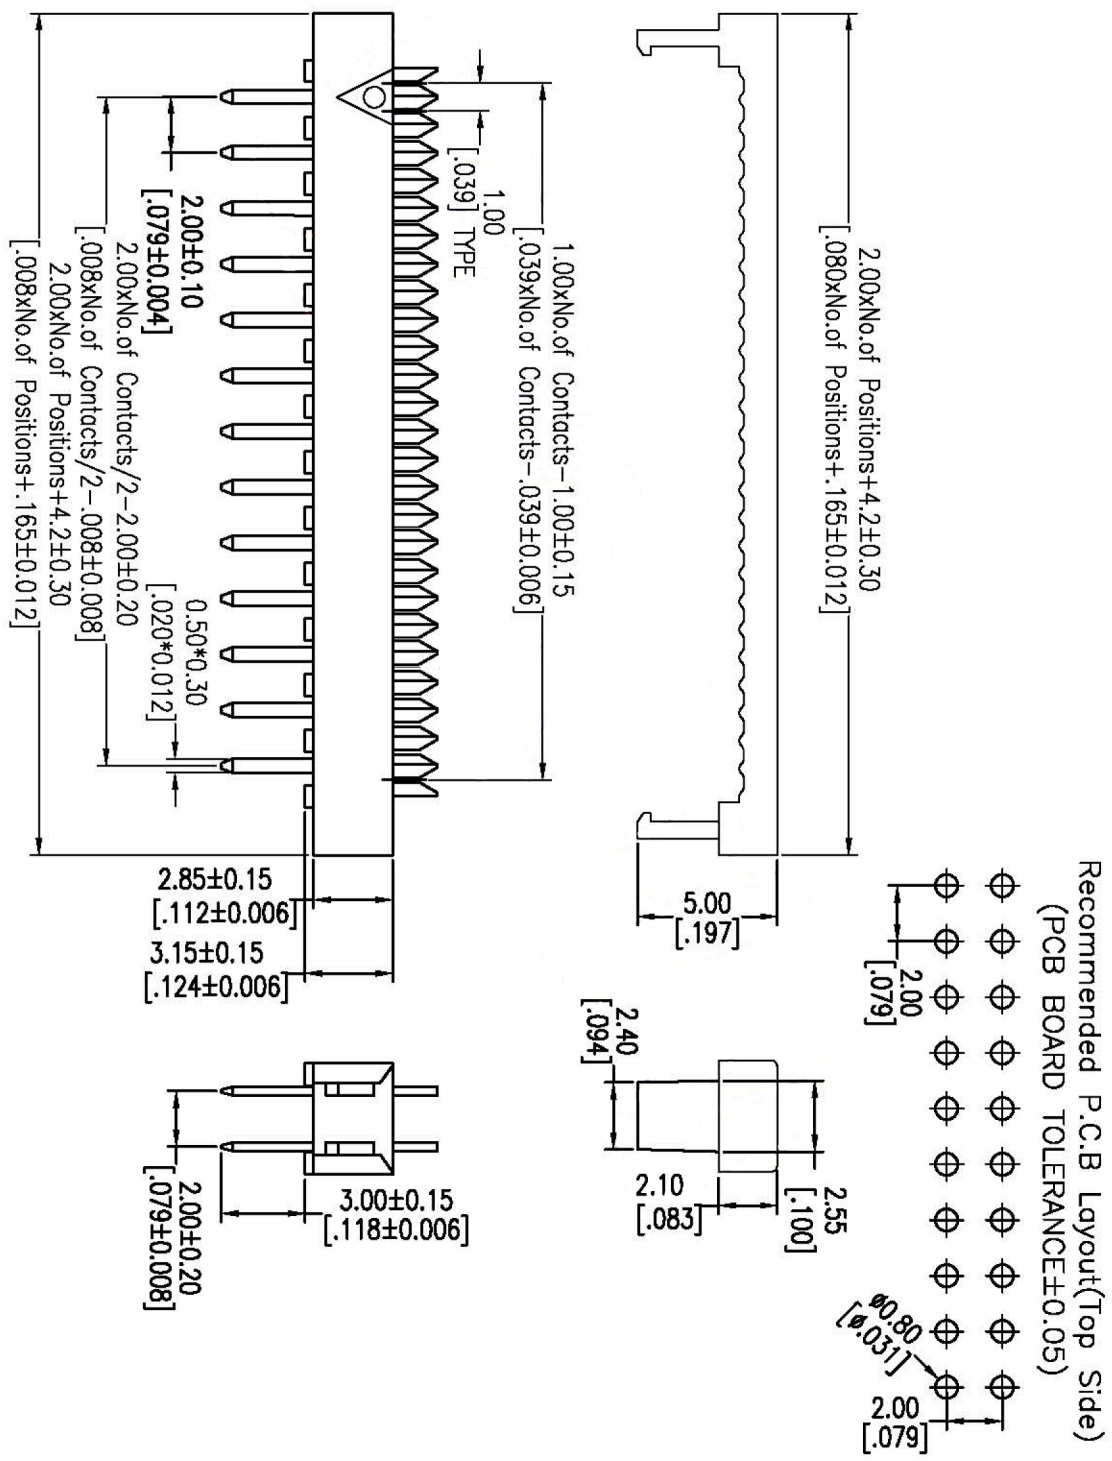

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:
A1	2013/07/03	Modify The Contact Material,Modify Part No.		X.X	JYhuang	2013/07/03	mm	A4	5320-XXPXXB01 △	2.00 DIP PLUG CONNECTOR
A0	2012/10/09	NEW		X.XXX	CHECK		mm	A4		
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	Angle	APPROVE	DATE	SHEET	PROJ.	Customer NO.	
				± 3°			1/1			

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: hui Feng_dzki@163.com
 公司网站: www.huifeng-china.com