







NOTES:

- Rated Current: 1.0AMP
- Contact Resistance: 30mΩ max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact Plating: Sn Over Ni
- Insulator Material: LCP+30%G.F UL94V-0
- Cover Material: PBT+15%G.F UL94V-0

Ordering Information

5341 - XX P XX X 0 1

No. of Pins Contact Plating Color Insulator
 SM=Matte Tin B=Black G=Grey(427C)

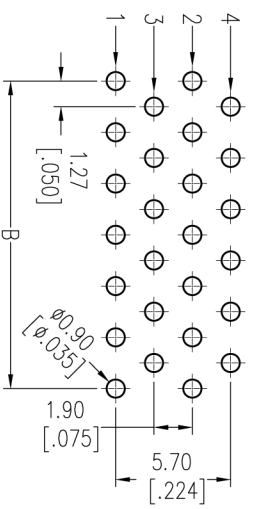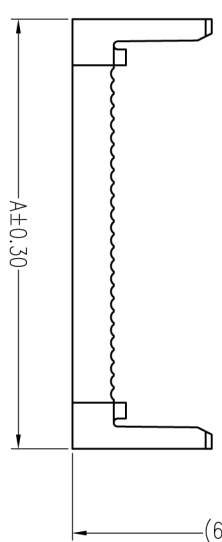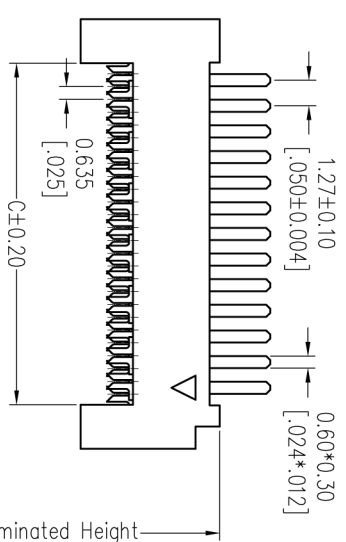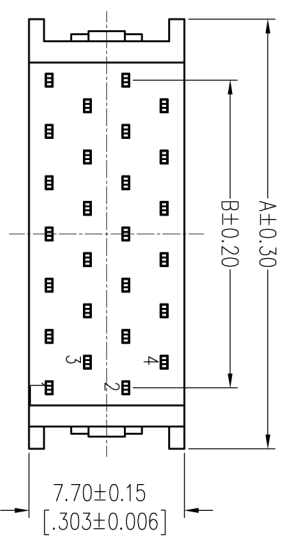

No. of Pins	A	B	C
10	11.13	5.08	6.76
20	17.48	11.43	13.11
26	21.29	15.24	16.92
30	23.83	17.78	19.46
40	30.18	24.13	25.81
50	36.53	30.48	32.16
60	42.88	36.83	38.51
68	47.96	41.91	43.59
70	49.23	43.18	44.86
72	50.50	44.45	46.13
80	55.58	49.53	51.21
90	61.93	55.88	57.56
100	68.28	62.23	63.91

OPERATION	XX	±0.40	DRAW	JYHuang	DATE	2012/10/09	SCALE	FIT	PART NO.	5341-XXPXXX01
CHECK	XXX	±0.25	CHECK		DATE		UNIT	mm	TITLE:	1.27mm DIP PLUG FOUR ROW FOOT
APPROVE	XXX	±0.15	APPROVE		DATE		SIZE	A4	"T"-TYPE	
ANGLE	±3°						SHEET	1/1	Customer NO.	
PROJ.										

HUIFENG 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: huiheng_dzki@163.com
 公司网站: www.huiheng-china.com