HSF

NOTES:
Current Rating: 1.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −40℃ to +105℃

Contact Material: Phosphor Bronze
Contact plating: Sn over Ni
Insulator Material: LCP+30%G.F UL94V-0

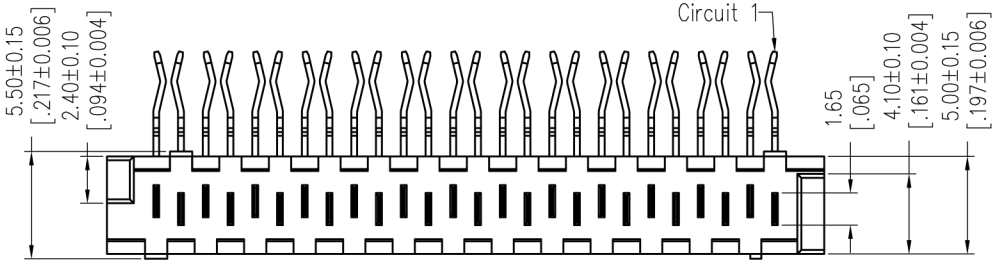

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

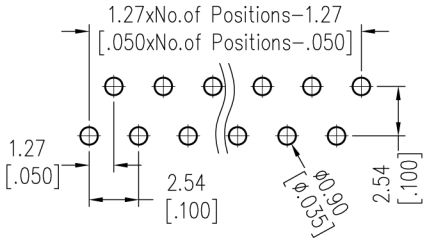

Ordering Information

3901-XX MR XX D N B X 1

No.of Pins		Contact Plating	Insulator	Color	Packing
04	16	SM=Matte Tin	D=LCP	B=Black	T=Tube
06	18	SN=Tin			
08	20				
10	22				
12	24				
14	26				

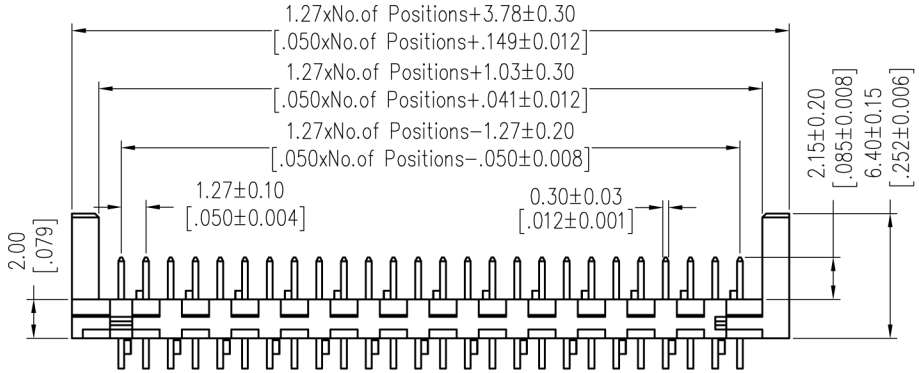

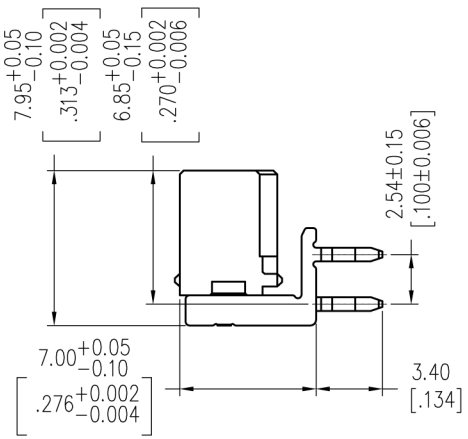

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/11/01	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	JYHuang	2012/11/01
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO.
3901-XXMRXXDNBX1

TITLE:
1.27mm Picoflex Header 90°

Customer NO.

上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd.
电话：021-67150229
传真：021-67150251
企业邮箱：huifeng_dzkj@163.com
公司网站：www.huifeng-china.com