HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 20mΩ Max
Withstand Voltage: 500V AC/DC
Insulation Resistance: 1000MΩ Min
Operation Temperature: −55℃ to +105℃

Contact Material:Phosphor Bronze/Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PBT+30%G.F UL94V-0
Sheel:Cold Roller Steel,Ni Plated
Nut:Brass,Sn over Ni Plated

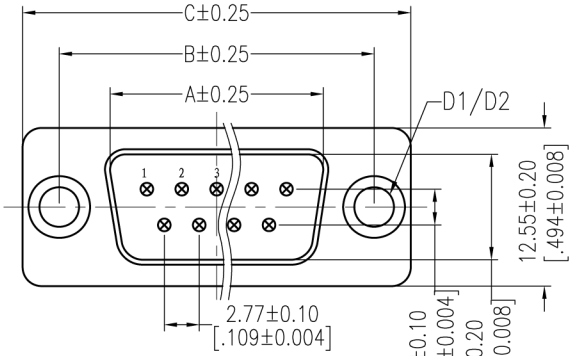



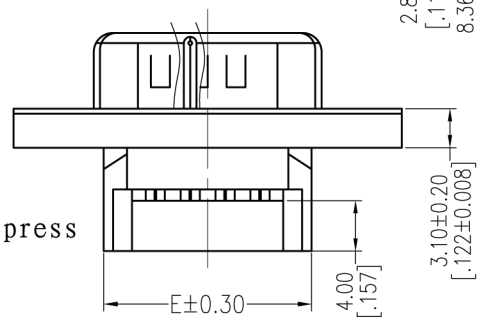

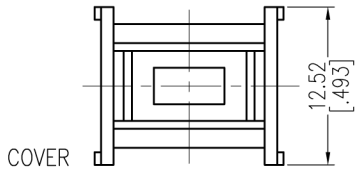

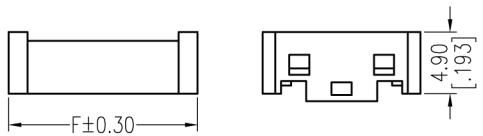

Ordering Information

6224- XX M N XX X 0 X

No.of Pins	Contact Plating	Insulator Color	Screw
09,15,25,37P	S0=Gold Flash/Tin	B:Black	1=Without Screw (three part)
	S3=10u"Gold/Tin	U:Blue	2=With Screw (three part)
	S4=15u"Gold/Tin		3=Without Screw (two part)
	S5=30u"Gold/Tin		4=With Screw (two part)
	SN=Tin		

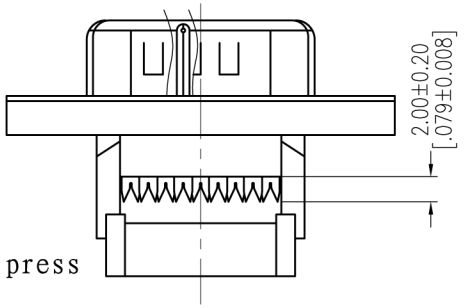

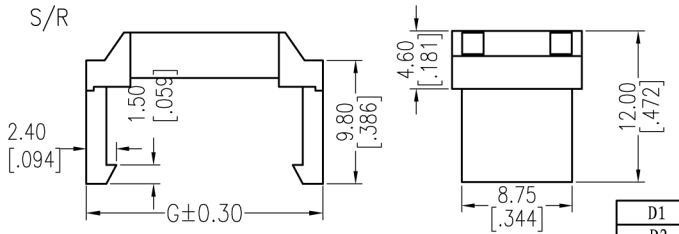

D1	6224-XXMNXXX01/3
D2	6224-XXMNXXX02/4

No. of Positions	DIM "A"	DIM "B"	DIM "C"	DIM "D1"	DIM "D2"	DIM "E"	DIM "F"	DIM "G"
09	16.92	24.99	30.81	Without Screw ø3.15	With Screw #4-40	16.50	15.00	18.80
15	25.25	33.32	39.14			24.80	23.30	26.90
25	38.96	47.04	53.04			38.60	37.00	40.50
37	55.42	63.50	69.32			55.20	53.70	57.20

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/12/06	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	JYHuang	2012/12/06
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	FIT
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO. SEE TABLE

TITLE: D-SUB MALE DUAL ROW IDC TYPE

Customer NO.

上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd.
电话：021-67150229
传真：021-67150251
企业邮箱：huifeng_dzkj@163.com
公司网站：www.huifeng-china.com