

NOTES:

Current Rating:3.0A AMP
 Contact Resistance:25milliohm Max
 Withstand Voltage:500V AC/Minute
 Insulation Resistance:1000MegoHM Min
 Operation Temperature:-55°C to +105°C
 Housing Material:PBt+30%GF(UL94V-0)
 Contact Material:Copper alloy
 Contact plating:Au/Sn over Ni Plating
 Shell:Gold Roller Steel,Ni or Sn Plated
 Revit/Harpoon:Brass,Tin Over Ni Plated
 Screw:Brass,Ni Plated









Ordering Information

6223-09 F XN XX B01

No. of Pins: Product Type
 9P W=With Revit
 With Screw
 M=With Revit
 Without Screw
 S=No Revit
 Lock With Screw
 H=With Revit
 With Screw(Dont lock)

Contact Plating:
 G0=Gold Flash
 G1=3u"Gold
 G2=5u"Gold
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 S0=Gold Flash/Tin
 S1=3u"Gold/Tin
 S2=5u"Gold/Tin
 S3=10u"Gold/Tin
 S4=15u"Gold/Tin
 S5=30u"Gold/Tin
 SN=Tin

Insulator Color:
 B= Black

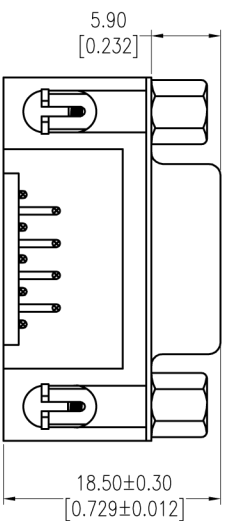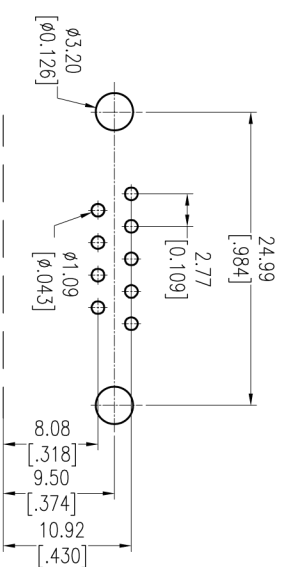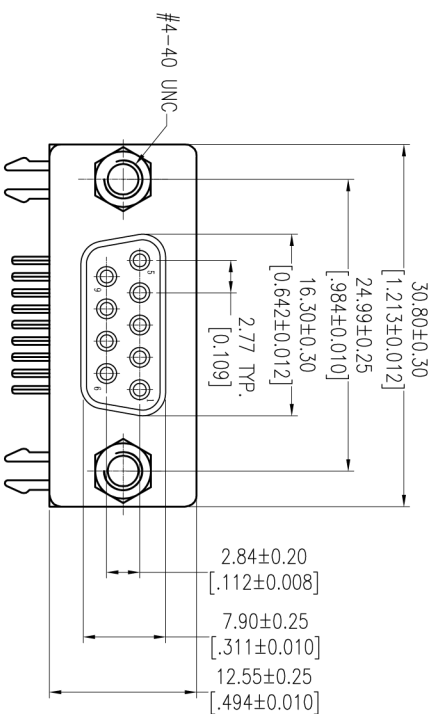

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:
A0	2014/02/28	NEW		XX ±0.40	Allen	2014/02/28	mm	A4	6223-09FNMXXXB01	D-SUB FEMALE CONNECTOR 9P
				XX ±0.25	CHECK		inch			8.08 FOOTPRINT RIGHT ANGLE TYPE
				X.XXX ±0.15	APPROVE			1/1		Customer NO.
				Angle ± 3°						
				DIM						

hf 上海回峰电子科技有限公司
 Shanghai Hui Feng Electronic Technology Co., Ltd

电话: 021-67150229
 传真: 021-67150251
 企业邮箱: huiheng_dzki@163.com
 公司网站: www.huiheng-china.com