# HSF

NOTES:
Current Rating: 3.0AMP
Contact Resistance: 25mΩ Max
Withstand Voltage: 500V AC/Minute
Insulation Resistance: 1000MΩ Min
Operation Temperature: -55℃ to +105℃

Contact Material:Brass
Contact plating:Au Or Sn over Ni
Insulator Material:PA66+30%G.F UL94V-0
Shell:Cold Roller Steel,Ni Plated
Revit/Harpoon:Brass,Sn Over Ni Plated

Print Date Code:

XX XX XX

Year Month Date

## *Ordering Information*

6215A-15 F M N XX X 01

| No.of Pins | Product Type | Contact Plating | Insulator Color |
|---|---|---|---|
| 15P | M=With Revit Without Screw | S0=Gold Flash/Tin<br>S3=10u"Gold/Tin<br>S4=15u"Gold/Tin<br>S5=30u"Gold/Tin<br>SN=Tin | B:Black<br>U:Blue |

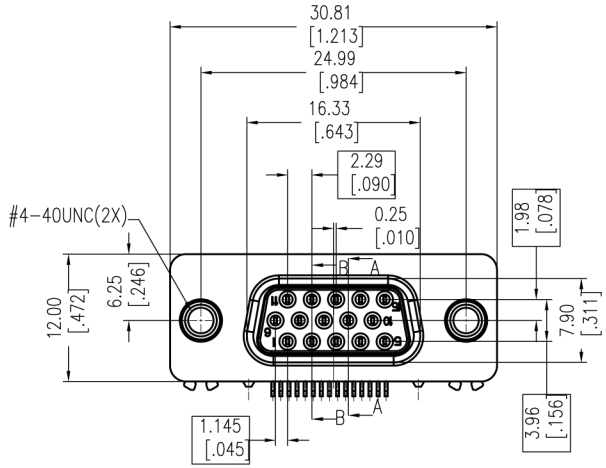


Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)

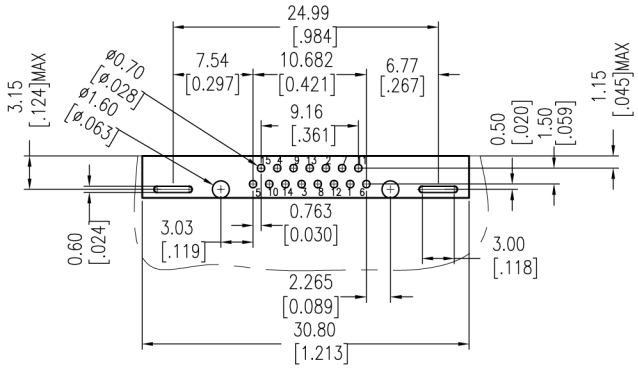


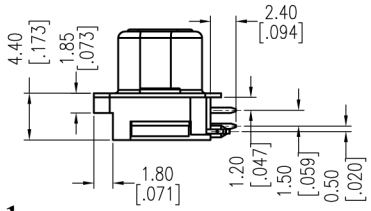


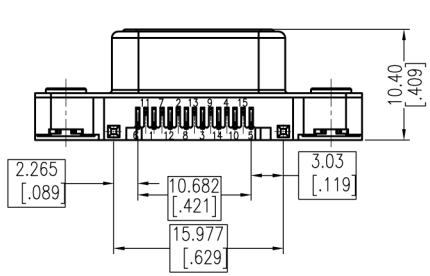


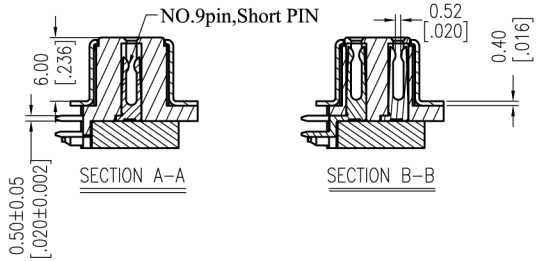


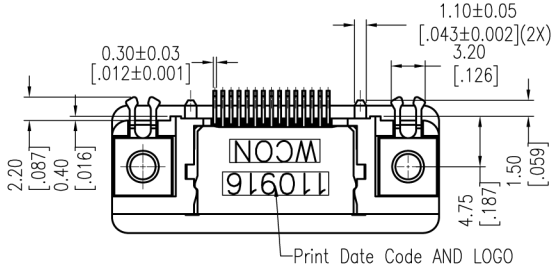





| REV | DATE | MODIFICATION DESCRIPTION | CHANGE |
|---|---|---|---|
| | | | |
| | | | |
| | | | |
| A0 | 2012/12/18 | NEW | ------ |

| OPERATION | |
|---|---|
| X.X | ±0.40 |
| X.XX | ±0.25 |
| X.XXX | ±0.15 |
| Angle | ± 3° |
| DIM | TOL |

| | | | |
|---|---|---|---|
| DRAW | JYHuang | DATE | 2012/12/18 |
| CHECK | | DATE | |
| APPROVE | | DATE | |

| | |
|---|---|
| SCALE | FIT |
| UNIT | mm |
| SIZE | A4 |
| SHEET | 1/1 |
| PROJ. | |

PART NO.
6215A-15FMNXXX01

TITLE:
Slim HD/R 15P FEMALE, 90° DIP, Short 9PIN

Customer NO.


上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd.
电话：021-67150229
传真：021-67150251
企业邮箱：huifeng_dzkj@163.com
公司网站：www.huifeng-china.com