


**NOTES:**



Current Rating: 3.0AMP  
 Voltage Rating: 250V AC,DC  
 Contact Resistance: 20m  $\Omega$  Max  
 Withstand Voltage: 800V AC/DC  
 Insulation Resistance: 1000M  $\Omega$  Min  
 Operation Temperature: -25  $^{\circ}$ C to +85  $^{\circ}$ C  
 Insulator Material: PA66 (UL94V-0)  
 Use with: WF2503-T  
 Mated With: WF2503-Wafer

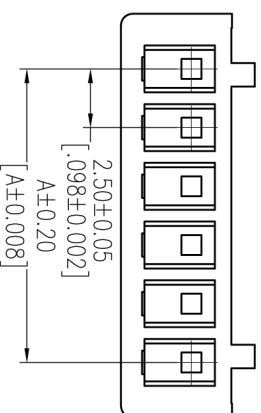

## Ordering Information

WF2503-H **XX** **X** **01**

No. of Pins      Color      Packing  
 02P-25P      W= White      0=PE Bag  
                   B= Black  
                   U= Blue  
                   E= Beige

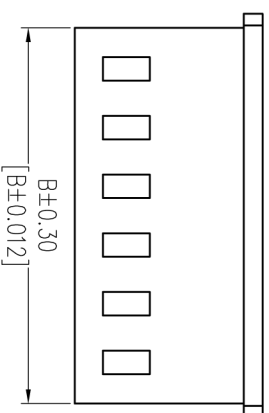

Specification & Ordering Information:

Circuit	Part No.	Dimension		Q'TY/ bag
		A	B	
02	WF2503-H02X01	2.50	6.00	1,000
03	WF2503-H03X01	5.00	8.50	1,000
04	WF2503-H04X01	7.50	11.00	1,000
05	WF2503-H05X01	10.00	13.50	1,000
06	WF2503-H06X01	12.50	16.00	1,000
07	WF2503-H07X01	15.00	18.50	1,000
08	WF2503-H08X01	17.50	21.00	1,000
09	WF2503-H09X01	20.00	23.50	1,000
10	WF2503-H10X01	22.50	26.00	1,000
11	WF2503-H11X01	25.00	28.50	1,000
12	WF2503-H12X01	27.50	31.00	1,000
13	WF2503-H13X01	30.00	33.50	1,000
14	WF2503-H14X01	32.50	36.00	1,000
15	WF2503-H15X01	35.00	38.50	1,000

OPERATION	XX	±0.40	DRAW	JYHuang	DATE	2012/09/05	SCALE	FIT	PART NO.	SEB TAB
CHECK	XXX	±0.25	CHECK		DATE		UNIT	mm	TITLE:	"M" TYPE 2.50 HOUSING
ANGLE	XXXX	±0.15	APPROVE		DATE		SIZE	A4	SHEET	1/1
CHANG			PROJ.						Customer NO.	
REV	DATE	MODIFICATION DESCRIPTION								
A0	2012/09/05	NEW								



**上海回峰电子科技有限公司**  
 Shanghai Hui Feng Electronic Technology Co., Ltd.  
 电话: 021-67150229  
 传真: 021-67150251  
 企业邮箱: huiheng\_dzki@163.com  
 公司网站: www.huiheng-china.com