HSF

NOTES:
Rated Current:1.0AMP.
Contact Resistance:20mΩ Max.
Withstand Voltage:500V AC/DC
Insulation Resistance:1000MΩ Min.
Operation Temperature:-40℃ to +105℃

Contact Material:Brass
Contact Plating:Au or Sn Over Ni
Insulator Material:PA9T+30%G.F UL94V-0 BK

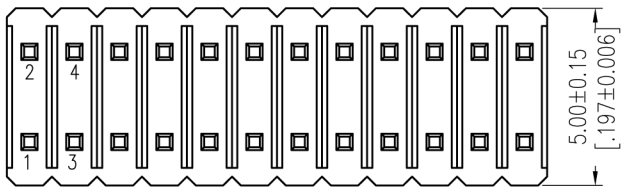

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE±0.05)

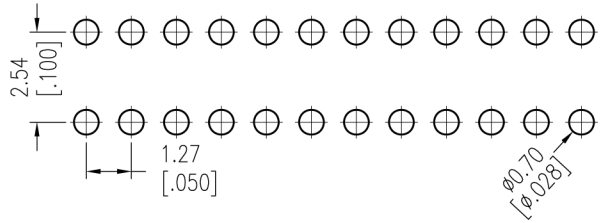

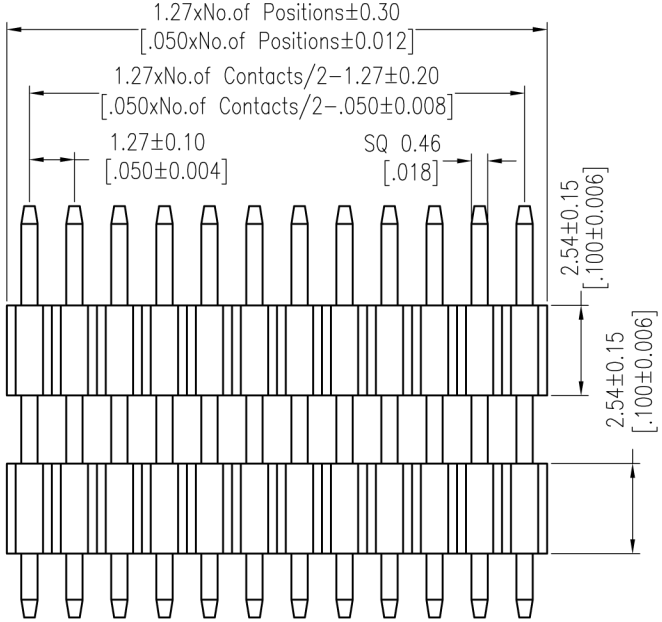

Ordering Information

1425-22 XX XX S XXX X X

No.of Pins	Contact Plating	Pin Length	Packing	Series No.
Per Row:02~50	G0=Gold Flash	L=A+B+C	A=Tray	1=Type 1
	G3=10u"Gold	Standard:	T=Tube	2=Type 2
	G4=15u"Gold			.....
	G5=30u"Gold			
	S0=Gold Flash/Tin			
	S3=10u"Gold/Tin			
	S4=15u"Gold/Tin			
	S5=30u"Gold/Tin			

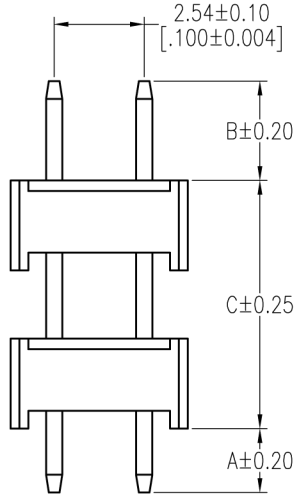

TYPE 1

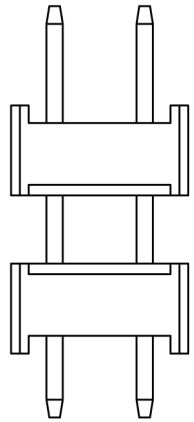

TYPE 2

Item	Pin Lenght	A	B	C	Mating
Standard	---	1.80	2.80	---	2446
	---	1.80	6.00	---	2485
Alternate					

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
A0	2012/04/06	NEW	------

OPERATION		DRAW	DATE
X.X	±0.40	William Chen	2012.04.06
X.XX	±0.25	CHECK	DATE
X.XXX	±0.15		
Angle	± 3°	APPROVE	DATE
DIM	TOL		

SCALE	Fit
UNIT	mm
SIZE	A4
SHEET	1/1
PROJ.	

PART NO.
1425-22XXXXSXXXXX

TITLE:
PH1.27*2.54 DUAL ROW
DOUBLE PLASTIC 180° H=2.54

Customer NO.

上海回峰电子科技有限公司
Shanghai Hui Feng Electronic Technology Co., Ltd.
电话：021-67150229
传真：021-67150251
企业邮箱：huifeng_dzkj@163.com
公司网站：www.huifeng-china.com