

HSE

NOTES:

Rated Current:3.0AMP.

Contact Resistance: 20mΩ Max.

Withstand Voltage:1000V AC/DC



Insulation Resistance:1000M Ω Min.

Operation Temperature: -40°C to $+105^{\circ}\text{C}$

Contact Material:Brass

Contact Plating: Au or Sn Over Ni



Insulator Material: PA9T+30%G.F UL94V-0  

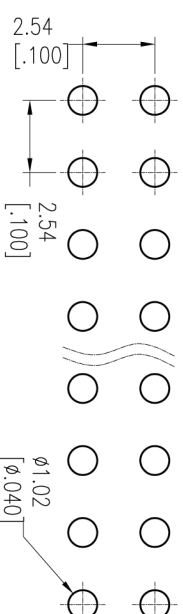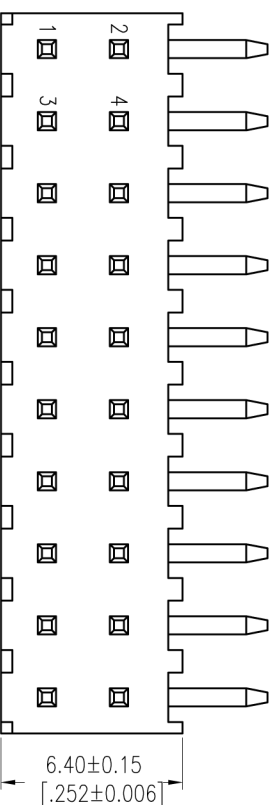

Recommended P.C.B Layout (Top Side)
(PCB BOARD TOLERANCE $\pm$ 0.05)

Ordering Information

1174-12 XX XX R XXX X X

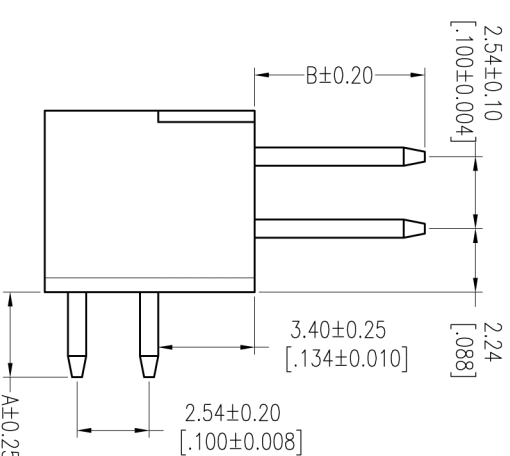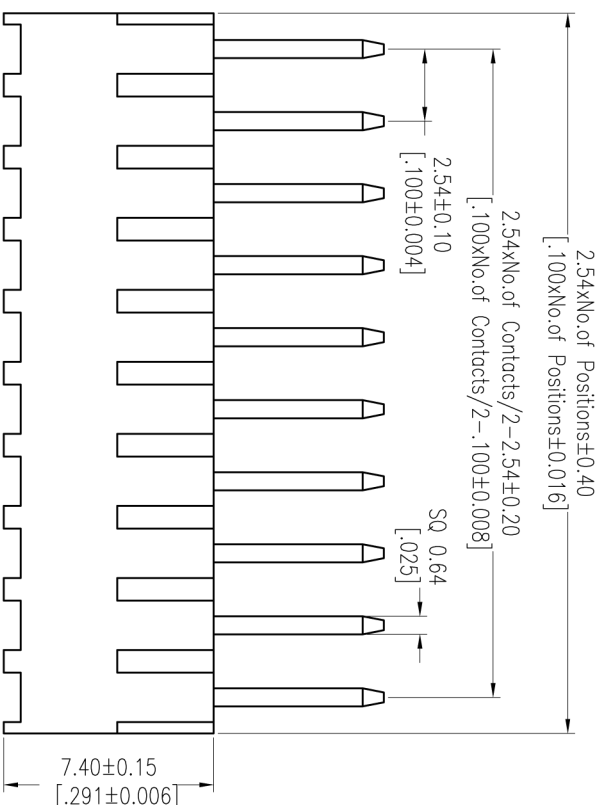

Item	Pin Length	A	B
Standard	14.60	3.00	6.00
Alternate			

							PART NO. 1174-12XXXXRXXXXX
A2	2013/03/01	Modify The Material		OPERATION X.X ±0.40	DRAW Tsingsn	DATE 2013/03/01	SCALE UNIT mm
A1	2012/12/13	Add PBT Material		X.XX ±0.25	CHECK	DATE	SIZE A4
A0	2012/05/08	NEW	----- 	X.XXX ±0.15		DATE	SHEET 1/1
REV	DATE	MODIFICATION DESCRIPTION	CHANGE	DIM TOL	APPROVE	DATE	PROJ.
						TITLE: PH2.54 DUAL ROW 90° H=7.4	
						Customer NO.	
 上海回峰电子科技有限公司 Shanghai Huifeng Electronic Technology Co., Ltd. 电话：021-67150229 传真：021-67150251 企业邮箱：hui Feng_dzki@163.com 公司网站：www.huifeng-china.com							