


# HSF


## NOTES:

Current Rating: 3.0AMP  
 Current Resistance: 20mΩ Max  
 Withstand Voltage: 1000V AC/DC  
 Insulation Resistance: 1000MΩ Min  
 Operation Temperature: -40°C to +105°C


Recommended P.C.B Layout(Top Side)  
 (PCB BOARD TOLERANCE±0.05)




Long Latch



Contact Material: Brass  
 Contact plating: Au Or Sn over Ni  
 Insulator Material: PA9T+50ZG; F UL94V-0  
 06P-18P Without Slot "A" and "B"  
 20P-58P Without Slot "A", With Slot "B"  
 60P-64P With Slot "A" and "B"

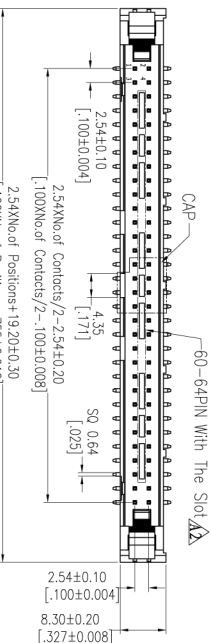



Short Latch



## Ordering Information

3210-XX M XX B X X 1

No. of Pins Contact Plating Insulator Color Latch Type Packing  
 06 24 Gold Gold Flash B-Black L-Long Latch T-Tube  
 08 26 Gold Gold Flash B-Black L-Long Latch T-Tube  
 10 30 Gold Gold Flash B-Black L-Long Latch T-Tube  
 12 32 Gold Gold Flash B-Black L-Long Latch T-Tube  
 14 40 Gold Gold Flash B-Black L-Long Latch T-Tube  
 16 50 Gold Gold Flash B-Black L-Long Latch T-Tube  
 18 60 Gold Gold Flash B-Black L-Long Latch T-Tube  
 20 64 Gold Gold Flash B-Black L-Long Latch T-Tube

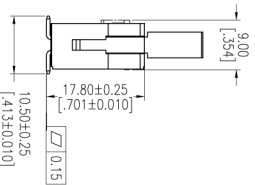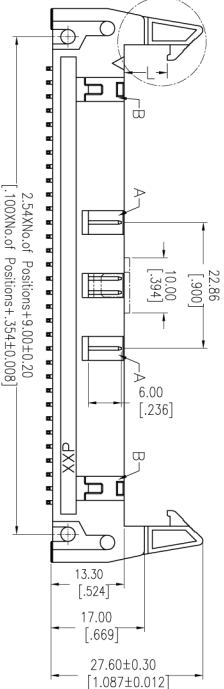

| Item      | Pitch | Mating |
|-----------|-------|--------|
| Standard  | 2.54  | 5211   |
| Alternate |       |        |

| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE | OPERATION | DRAW    | DATE       | SCALE | FIT          | PART NO.                |
|-----|------------|--------------------------|--------|-----------|---------|------------|-------|--------------|-------------------------|
| A2  | 2014/12/03 | Modify                   | Δ      | XX ±0.40  | ALL en  | 2014/12/03 | UNIT  | mm           | 3210-XXMXXBXX1          |
| A1  | 2013/02/25 | Modify                   | Δ      | XXX ±0.25 | CHECK   | DATE       | SIZE  | A4           | TITLE:                  |
| A0  | 2012/10/08 | NEW                      | Δ      | XXX ±0.15 | APPROVE | DATE       | SHEET | 1/1          | 2.54 ELECTOR HEADER SMT |
| REV | DATE       | MODIFICATION DESCRIPTION | CHANGE | Δ         | APPROVE | DATE       | PROJ. | Customer NO. |                         |

上海回峰电子科技有限公司  
 Shanghai Hui Feng Electronic Technology Co., Ltd.

电话: 021-67150229  
 传真: 021-67150251  
 企业邮箱: huiheng\_dzhi@163.com  
 公司网站: www.huiheng-china.com